



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.05.2000 Bulletin 2000/18

(51) Int Cl.7: **H01L 27/146**

(21) Application number: **99308455.7**

(22) Date of filing: **26.10.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Mochizuki, Chiori**
Ohta-ku, Tokyo (JP)

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
High Holborn
2-5 Warwick Court
London WC1R 5DJ (GB)

(30) Priority: **28.10.1998 JP 30703398**


(71) Applicant: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(54) **Image pick-up apparatus and image pick-up system, and method for manufacturing image pick-up apparatus**

(57) A scintillator layer for converting an incident radiation into a light having a wavelength detectable with a photoelectric conversion element is provided on a sen-

sor substrate on which plural photoelectric conversion elements and switching elements are disposed via a flattening layer.

FIG. 3B

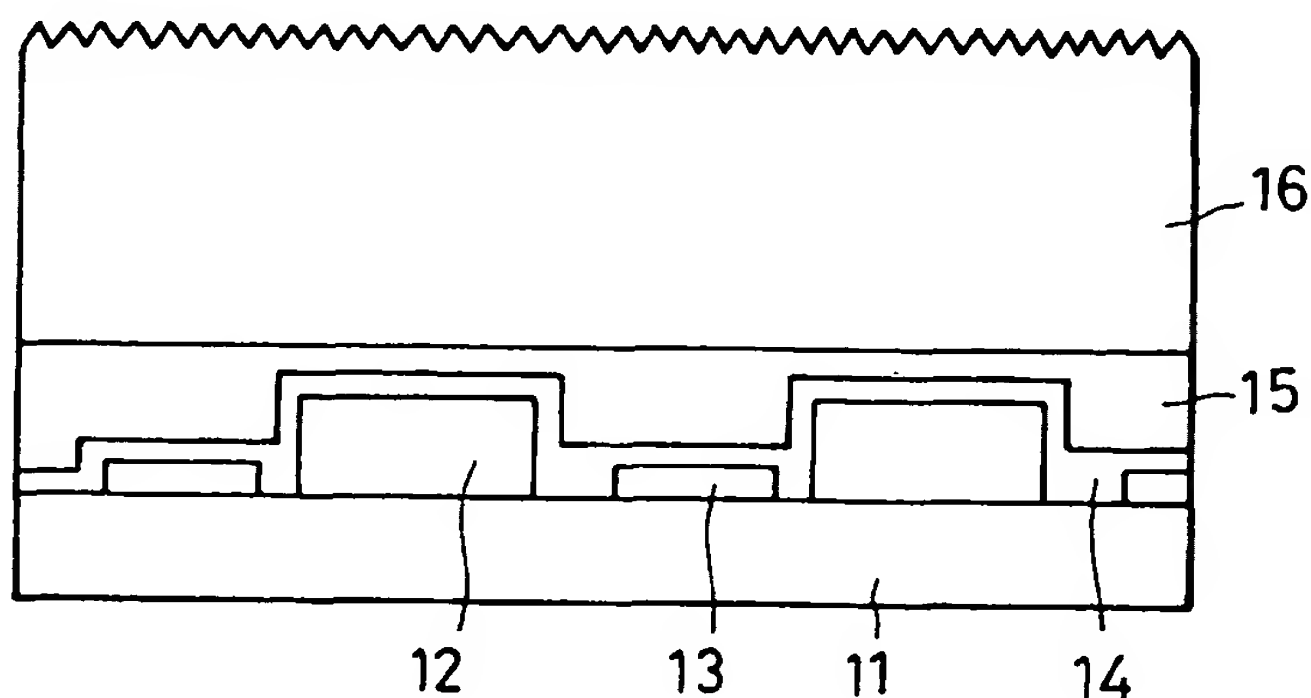

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an image pick-up apparatus and an image pick-up system, and a method for manufacturing the image pick-up apparatus. The present invention relates, for example, to an image pick-up apparatus provided with a scintillator layer for converting an incident radiation such as X-ray to a light having a wavelength detectable with the photoelectric conversion element on a sensor substrate on which plural pairs of a photoelectric conversion element and switching element are disposed, and an image pick-up system, and a method for manufacturing the image pick-up apparatus.

Description of the Related Art

[0002] A system for converting a radiation such as X-ray into a light having a wavelength in a sensing region with a scintillator and for converting the light into an electric signal with an image sensor to store and transfer as an image data is noticed in the fields of medical inspection and nondestructive testing.

[0003] An image pick-up apparatus is disclosed in Japanese Patent Laid-open No. 7-27863 as an example of the image pick-up apparatus such as a radiation image pick-up apparatus for use in the system as described above, wherein CsI is used for the scintillator material for converting X-ray into a light and the CsI elements are disposed on a two-dimensional substrate.

[0004] Meanwhile, high sensitivity is required for the image pick-up apparatus for completing the medical inspection and nondestructive testing within a short period of time in order to reduce X-ray dosage to the testing subjects and human body by taking the effect of radiation into considering.

[0005] Accordingly, development of an image pick-up apparatus that can efficiently convert a radiation such as X-ray into an electric signal is desired.

SUMMARY OF THE INVENTION

[0006] Accordingly, the object of the present invention is to provide an image pick-up apparatus for enabling it to be highly sensitive and a method for manufacturing the same, and an image pick-up system.

[0007] An another object of the present invention is to provide an image pick-up apparatus having a wavelength converter with excellent characteristics and a method of for manufacturing the same, and an image pick-up system.

[0008] An additional object of the present invention is to provide an image pick-up apparatus having a high reliability and improved durability and a method for man-

ufacturing the same, and an image pick-up system.

[0009] An another object of the present invention is to provide an image pick-up apparatus being able to increase substantial aperture of pixels of the image pick-up apparatus for making sensitivity of the apparatus high and enhancing reading speed and a method for manufacturing the same, and an image pick-up system.

[0010] In a first aspect, the present invention provides an image pick-up apparatus comprising a wavelength converter for converting an incident radiation to a light having a wavelength detectable with a photoelectric conversion element on a sensor substrate on which plural photoelectric conversion elements and a switching elements are disposed, wherein a flattening layer having a flat face making a contact with the wavelength converter is provided between the sensor substrate and wavelength converter.

[0011] In accordance with another aspect of the present invention, the present invention provides an image pick-up apparatus comprising plural sensor substrates on which plural photoelectric conversion elements and switching elements are disposed, wherein the plural sensor substrates comprise flattening layers and a wavelength converter is provided on each flattening layer.

[0012] In accordance with a further aspect of the present invention, the present invention provides an image pick-up apparatus comprising a wavelength converter for converting an incident radiation into a light having a wavelength detectable with the photoelectric conversion element on a sensor substrate comprising plural photoelectric elements and switching elements, wherein a flattening layer having a flat plane making a contact with the wavelength converted is provided between the sensor substrate and scintillator layer; or image pick-up apparatus comprising plural sensor substrates on which plural photoelectric conversion elements and switching elements are disposed, a flattening layer being provided on the plural sensor substrates and the wavelength converter being provided on the flattening layer; and an image pick-up system comprising a signal processing device for processing the signal from the image pick-up apparatus, a recording device for recording the signal from the image processing device, and a display device for displaying the signal from the image processing device.

[0013] In accordance with another aspect of the present invention, the present invention provides a method for manufacturing an image pick-up apparatus comprising the steps of: forming a protective layer on a sensor substrate comprising plural photoelectric conversion elements and switching elements; forming a flattening layer having a flat surface on the protective layer; and forming a wavelength converter on the flattening layer.

[0014] In accordance with another aspect of the present invention, the present invention provides a method for manufacturing an image pick-up apparatus

comprising the steps of: forming a protective layer on a sensor substrate comprising plural photoelectric conversion elements and switching elements, flattening the surface of the protective layer; and forming a wavelength converter on the flattened protective layer.

[0015] In accordance with another aspect of the present invention, the present invention provides a method for manufacturing an image pick-up apparatus comprising the steps of: providing a flattening layer on plural sensor substrates after disposing the plural sensor substrates comprising plural photoelectric conversion elements and switching elements; and providing a wavelength converter on the flattening layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Fig. 1 illustrates an equivalent circuit diagram of the sensor provided on the sensor substrate.

[0017] Fig. 2 denotes a schematic cross section of the sensor.

[0018] FIG. 3A denotes a schematic cross section for describing one example of the manufacturing step of the image pick-up apparatus.

[0019] FIG. 3B denotes a schematic cross section for describing an another example of the manufacturing step of the image pick-up apparatus.

[0020] FIG. 4A denotes a schematic cross section for describing an another example of the manufacturing step of the image pick-up apparatus.

[0021] FIG. 4C denotes a schematic cross section for describing an another example of the manufacturing step of the image pick-up apparatus.

[0022] FIG. 5 denotes a schematic cross section for describing the polishing area.

[0023] FIG. 6 denotes a schematic cross section of the image pick-up apparatus.

[0024] FIG. 7 illustrates an example for flattening the surface of the scintillator.

[0025] FIG. 8A denotes a schematic plane view for describing an example of the periphery of the image pick-up apparatus.

[0026] FIG. 8B denotes a schematic cross section for describing an example of the end face of the image pick-up apparatus.

[0027] FIG. 9A denotes a schematic cross section for describing an example of the fabrication step of the image pick-up apparatus.

[0028] FIG. 9B denotes a schematic cross section for describing an example of the fabrication step of the image pick-up apparatus.

[0029] FIG. 9C denotes a schematic cross section for describing an example of the fabrication step of the image pick-up apparatus.

[0030] FIG. 9D denotes a schematic cross section for describing an example of the fabrication step of the image pick-up apparatus.

[0031] FIG. 10 illustrates an another example of the image pick-up apparatus.

[0032] FIG. 11 illustrates an another example of the image pick-up apparatus.

[0033] FIG. 12A denotes a schematic cross section for describing an example of the manufacturing step of the image pick-up apparatus.

[0034] FIG. 12B denotes a schematic cross section for describing an another example of the manufacturing step of the image pick-up apparatus.

[0035] FIG. 13A denotes a schematic cross section for describing an example of the manufacturing step of the image pick-up apparatus.

[0036] FIG. 13B denotes a schematic cross section for describing an another example of the manufacturing step of the image pick-up apparatus.

[0037] FIG. 14 denotes a schematic perspective view for describing an another example of the image pick-up apparatus.

[0038] FIG. 15 denotes a schematic cross section of the image pick-up apparatus illustrated in FIG. 14.

[0039] FIG. 16A denotes a schematic plane view of an example showing the arrangement of the sensor substrates.

[0040] FIG. 16B denotes a schematic cross section of a part of the image pick-up apparatus.

[0041] FIG. 17A denotes a schematic plane view for describing an another example of the sensor (a pixel).

[0042] FIG. 17B denotes a schematic cross section of the sensor.

[0043] FIG. 18A denote a schematic plane view for describing an example of disposition of the sensor and peripheral circuits in the image pick-up apparatus.

[0044] FIG. 18B denotes a schematic cross section of the image pick-up apparatus.

[0045] FIG. 19 shows an illustrative drawing for describing an example of the image pick-up system.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0046] Examples of the sensor substrate shown in FIG. 1 and FIG. 2 applied to the present invention will be described below.

[0047] The reference numerals 101 and 102 in FIG. 1 and FIG. 2 denote a PIN type photodiode and a TFT, respectively. The PIN type photodiode 101 and TFT 102 differ in their layer construction and film thickness with each other as is evident from FIG. 2 (detailed constructions will be described hereinafter), causing a large step on the surface of the sensor substrate at the boundary between the TFT and photodiode.

[0048] When a non-single crystalline semiconductor, for example an amorphous silicon film (a-Si film) is used for a sensor material and Al is used for a wiring material, a SiN protective film is deposited under restricted deposition temperatures. Accordingly, covering the steps on the surface of the sensor substrate involves some problems to be investigated, although the surface steps remain even after the steps on the surface has been appropriately covered.

[0049] According to the studies by the inventors of the present invention, growth of Csl crystals becomes poor at the steps on bias lines of the PIN type photodiode and peripheral areas, forming distorted crystals to cause decrease of substantial aperture ratio, when a scintillator made of, for example, Csl is formed on the stepped surface. The inventors of the present invention have succeeded in obtaining a scintillator layer having good crystallinity by flattening the surface where the Csl scintillator layer is to be formed.

[0050] The difference between the invention described in Japanese Patent Laid-open No. 7-27863 and the present invention will be then described. Japanese Patent Laid-open No. 7-27863 discloses that concave or convex patterns are formed on the substrate to generate cracks at a designated site for forming the scintillator when the scintillator is formed on the substrate. However, it is not disclosed in the patent publication that the steps adversely affect crystallinity of the scintillator layer to decrease its aperture ratio, so that the surface adjoining to the scintillator layer should be flattened in order to alleviate the effect of the step.

[0051] The term "radiation" in the present invention refers to a particle beam or an electromagnetic wave, and the term "scintillator" refers to a substance that converts the particle beam or electromagnetic wave into a light having a wavelength detectable with a photoelectric conversion element. The present invention is advantageously used for X-ray that is used in the medical inspection and non-destructive testing.

[0052] Examples according to the present invention will be described hereinafter in detail with reference to the drawings. The examples below describe a X-ray image pick-up apparatus as an example of the image pick-up apparatus.

(Example 1)

[0053] The first example of the present invention will be described with reference to a sensor substrate making use of a PIN type photosensor as the photoelectric conversion element and a TFT as a switching element.

[0054] FIG. 3A and FIG. 3B denote schematic cross sections for describing examples of the manufacturing steps of the X-ray image pick-up apparatus in Example 1 according to the present invention.

[0055] As shown in FIG. 3A, a photoelectric conversion element 12 and TFT 13 comprising the PIN type photodiode are formed on a glass substrate 11, on which a SiN protective film 14 is deposited for stabilizing characteristics of the devices.

[0056] FIG. 1 illustrates an equivalent circuit diagram and FIG. 2 show a schematic cross section of the sensor substrate. The reference numeral 101 denotes the PIN type photodiode, the reference numeral 102 denotes the TFT, the reference numeral 103 denotes a signal line, the reference numeral 104 denote a gate line and the reference numeral 105 denote a sensor bias line in FIG.

2.

[0057] The reference numeral 201 denotes the glass substrate, the reference numeral 202 denotes the gate line, the reference numeral 203 denotes a gate insulation film, the reference numeral 204 denotes an i-type a-Si active layer, the reference numeral 205 denotes a SiN film, the reference numeral 206 denotes a n⁺-type ohmic contact layer, the reference numeral 207 denotes a SD (source-drain) electrode, the reference numeral 208 denotes a lower sensor electrode, the reference numerals 210, 211 and 212 denote p-, i- and n-type Si layers, respectively, the reference numeral 209 denotes a sensor upper electrode, and the reference numeral 213 denotes a SiN protective film in FIG. 2.

[0058] The TFT employs an inverse stagger type TFT composed of the SiN gate insulation layer, i-type a-Si active layer and n⁺-ohmic contact layer as shown in FIG. 2 in the present invention. The PIN type photodiode is composed of, on the other hand, the p-type a-Si layer, i-type a-Si layer and n-type a-Si layer. In other words, the layer constructions differ between the TFT and PIN type photodiode, consequently forming large surface steps among functional elements on the sensor substrate.

[0059] The SiN protective layer 14 is usually formed on the sensor substrate having the construction as described above for stabilizing the device characteristics.

[0060] A polyimide layer as a flattening layer 15 was then coated using a spinner as shown in FIG 3A. Semcofine (LP-62 usually having a viscosity of 600 to 1,000 cps with a solid fraction of 16.5 to 18.5%) made by Torey Co. was used as the polyimide resin. The spin coat conditions were 50 (rpm)/30 (sec) for the first coating and X (rpm)/60 (sec) for the second coating (X = viscosity (cps) × solid fraction (%) × 0.0563).

[0061] The flattening layer can be also formed by a screen printing method, roll coater method, spray method, and spray and spin coating method. Csl is deposited thereafter to form a scintillator layer 16 (FIG. 3B). Csl was grown as a columnar crystal in this example since the scintillator may be expected to have higher sensitivity and crosstalk can be reduced. A Csl crystal having good crystallinity could be obtained in this example by flattening the Csl deposition face by forming a flattening layer 15.

(Example 2)

[0062] An Al film was coated as a light reflection film (also serves as a protective film) in the second example of the present invention besides flattening the surface of the Csl layer as described in the first example.

[0063] FIG. 4A to FIG. 4B denote schematic cross sections showing examples of the manufacturing steps of the X-ray image pick-up apparatus in the second example according to the present invention.

[0064] In the lamination step of Csl shown in FIG. 4B, the apparatus is manufactured by the same manufac-

turing steps explained using FIG. 3A and FIG. 3B.

[0065] The surface of the laminated Csl 16 was then flattened. When Csl had been grown as columnar crystals, the surface becomes rough with a roughness of several microns to several tens microns. The surface was flattened using a polyurethane abrasive cloth and silica abrasive in this example in order to uniformly form the reflection film or moisture protective film with good coverage. FIG. 5 denotes a schematic cross section showing the polishing area P. Flattening is also possible using photolithography such as an etch-back method.

[0066] An Al film 17 serving as the reflection film and protective film was completed thereafter (FIG. 4C).

(Example 3)

[0067] The Al film was formed after forming the polyimide film as a flattening layer on the Csl layer (the scintillator layer 16) in Example 3 of the present invention, instead of polishing the Csl layer as in the second example.

[0068] FIG. 6 shows a schematic cross section showing the construction of the X-ray image pick-up apparatus in Example 3 according to the present invention.

[0069] The same manufacturing steps as described in Example 1 with reference to FIG. 3A and FIG. 3B are used until the Csl lamination step for manufacturing the X-ray image pick-up apparatus according to the present example.

[0070] Then, the polyimide layer as a flattening layer is coated on the laminated Csl layer 16 using a spinner. The surface is flattened by coating a polyimide film with a roughness of several microns to several tens microns when Csl is grown as columnar crystals as described above. The Al film serving as the reflection film and protective film was further formed in order to uniformly form the reflection film or moisture protective film with good coverage. FIG. 7 shows a schematic cross section after forming the polyimide film as a flattening layer and the Al film.

[0071] The polyimide film 18 and Al film 17 are also formed on the end faces of the scintillator layer 16 as shown in FIG. 8A and FIG. 8B in this example. The Csl crystals to serve as the scintillator layer 16 are packaged with the polyimide film 15 serving as a first flattening layer and the polyimide film 18 serving as a second flattening layer. In addition, the first and second flattening layers are packaged with the Al film 17 to serve as the moisture protective film. Such construction allows, for example, the Csl crystals constituting the scintillator layer 16 to be protected from ambient atmosphere such as moisture, improving their durability.

[0072] FIG. 9A to FIG. 9D illustrate the manufacturing steps when the polyimide film 18 and Al film 17 are formed on the end face of the scintillator layer 16 on the sensor substrate.

(Example 4)

[0073] The same effects can be obtained by covering the sensor substrate including the scintillator layer with a metal foil such as an aluminum foil, instead of the end face treatment as shown in Example 3.

[0074] FIG. 10 and FIG. 11 show a schematic cross sections of the X-ray image pick-up apparatus in which the sensor substrate including the scintillator layer is covered after forming the scintillator layer on the flattened sensor substrate. The metal foil 214 is drawn so as to cover the end face of the scintillator layer 211 with inclined faces, and the edge of the foil is bent downward for sealing a part of the sensor substrate with a resin seal 216. Moisture can be prevented from permeating with an organic or inorganic resin seal 216 in this construction, while protecting the scintillator layer 211 from permeation of moisture by virtue of spaces formed between the metal foil 214 and scintillator layer 211.

[0075] The metal foil 214 is bent along the end face of the scintillator layer 214 in FIG. 11, thereby sealing the circumference of the scintillator layer with the resin seal 216 comprising the organic or inorganic resin. Since the end face of the scintillator layer is covered with a metal in this construction, permeation of moisture into the scintillator layer can be prevented.

(Example 5)

[0076] The Csl deposition surface is flattened by polishing the SiN protective film by CMP (chemical mechanical polishing) in Example 5, instead of using the polyimide film as in Example 3 and Example 4 described above.

[0077] FIG. 12A and FIG. 12B show schematic cross sections for describing examples of the manufacturing steps of the X-ray image pick-up apparatus in Example 5 according to the present invention. Since this example is the same as the manufacturing steps in Example 3, except that the SiN protective film is polished for flattening the Csl deposition surface instead of forming the polyimide film, the polishing step is mainly described.

[0078] As shown in FIG. 12A, the SiN protective film 14 is flattened by polishing by CMP after forming the SiN protective film 14 so as to fill the surface roughness caused by the PIN type photodiode 12 and TFT 13. The Csl layer 16, polyimide film 18 as a flattening layer and Al film 17 to serve as a moisture protective film are formed thereafter by the same method in Example 3 as shown in FIG. 12B. A SiO₂ film may be used as the protective film 14.

[0079] While it is desirable for some portions of the protective film 14 that protect the PIN type photodiode 12 and TFT 13 to form a minute film so that characteristics of the PIN type photodiode and TFT are not adversely affected, such films are not necessarily formed on the portions merely to be flattened.

(Example 6)

[0080] FIG. 13A and FIG. 13B demonstrates schematic drawings when the portions for protecting the PIN type photodiode 12 and TFT 13 are formed of the minute first protective film 14 so as not to adversely affect their characteristics, while the portions for filling the rough portions are formed of the second protective layer 19 comprising the materials that can be readily polished and having a high deposition speed.

[0081] A SiN film and SiO₂ film may be formed as the first protective film 14 and a second protective film 19, respectively, or the first protective film 14 and second protective film 19 may be formed using the same film material (SiN film or SiO₂ film) but changing the deposition method and deposition condition. Examples of the method for forming the first protective film 14 and second protective film 19 using the same material but changing the manufacturing conditions comprise depositing the first protective film 14 by a CVD method using a mixed gas of H₂, N₂ and SiH₄, and depositing the second protective film 19 by a CVD method using a mixed gas of H₂, NH₃ and SiH₄, thereby making it possible to form the protective films without adversely affecting the characteristics of the PIN type photodiode while improving the deposition speed. Examples of the method for forming the first protective film 14 and second protective film 19 by changing respective manufacturing methods comprise depositing the first protective film by a CVD method using a mixed gas of H₂, N₂ and SiH₄, and depositing the second protective film by a sputtering method.

[0082] Of course, it is preferable to protect the scintillator layer in Examples 5 and 6 as in Examples 3 and 4.

[0083] While the X-ray image pick-up apparatus using one sheet of the sensor substrate was described in Examples 1 to 6, plural sensor substrates may be packaged in adjoining relation with each other in order to form a more larger area of the X-ray image pick-up apparatus when the size of one sensor substrate is limited. An example of a large area X-ray image pick-up apparatus packaged by bonding plural substrates is described with reference to FIG. 14 and FIG. 15.

[0084] The sensor substrate 20 comprises a PIN type photodiode, TFT and a first SiN protective layer, on which a first polyimide flattening layer 15, a scintillator layer 16 such as a CsI layer, a second polyimide flattening layer 18 and an Al reflection layer 17 are provided. A second SiN protective layer (not shown) may be further provided on the Al reflection layer 17. The second SiN protective film may be provided for protecting the Al reflection film from being corroded during cutting off the sensor substrate.

[0085] The image pick-up device 200 having the construction as described above is cut-off with a diamond blade, and cut-off pieces were bonded on a substrate 21 with an adhesive 201 so as to dispose each piece in adjoining relation with each other as show in FIG. 14.

[0086] FIG. 15 shows a schematic cross section along the line A-A in FIG. 14. As shown in FIG. 15, a black resin 22 is filled into the gaps among the image pick-up devices in order to prevent optical crosstalk of the light whose wavelength has been converted with the scintillator. It is desirable to cover the end face of the sensor substrate with a resin 23 such as an epoxy resin when the end face is exposed. The gap between the image pick-up devices 200 is drawn larger than the actual size in FIG. 15 for the purpose of easy understanding of disposition of the resin 22.

(Example 7)

[0087] Plural sensor substrates 20 are bonded followed by flattening in Example 7 according to the present invention.

[0088] A polyimide flattening layer 15 is coated after bonding plural substrates 20 on the substrate 21 as shown in FIG. 16A and FIG. 16B. The crossing portion after bonding, or the gap between the sensor substrates 20, is once filled with the polyimide resin using a dispenser, followed by spin-coating the polyimide resin again over the entire surface of the substrate to form a flattening layer 15. Then, a scintillator layer 16 such as a CsI layer is deposited and an Al film 17 is formed after coating a second polyimide layer 18 on the scintillator layer 16.

[0089] A black resin may be coated on the end face of the substrate and a part of the substrate (not shown) before bonding the substrate.

[0090] It is needless to say that the polyimide film 18 and Al film 17 may be formed on the end face of the scintillator, or the end face of the image pick-up device may be covered with a metal foil such as an aluminum foil.

[0091] Although the PIN type photodiode sensor is used as the photoelectric conversion element in the examples as hitherto described, a MIS type photosensor having the same construction as TFT may be used. An example of the X-ray image pick-up apparatus using the MIS type photosensor is disclosed in Japanese Patent Laid-open No. 7-250512.

[0092] FIG. 17A shows a schematic plane view of the portion corresponding to one pixel while FIG. 17B shows a schematic cross section of the portion indicated by a dot-in-broken line in FIG. 17A.

[0093] The reference mark S11 denotes a photoelectric conversion element, the reference mark T11 denotes a TFT, the reference mark C11 denotes a capacitor and the reference numeral SIG denotes a signal line. The reference numeral 301 denotes a lower electrode formed of Al or Cr provided on an insulation substrate such as a glass plate. The reference numeral 302 denotes an insulation layer made of, for example, silicon nitride (SiN) that prevents permeation of electrons and holes. The thickness of the insulation layer is adjusted to 500 Å or more that is a thickness enough for prevent-

ing permeation of electrons and holes by a tunnel effect. The reference numeral **303** denotes a photoelectric conversion semiconductor layer formed of an i-layer of an intrinsic semiconductor such as hydrogenated amorphous silicon (a-Si:H). The reference numeral **304** denotes an injection preventive layer formed of a n⁺-layer of a-Si for preventing injection of holes from a transparent electrode **305** side to the photoelectric conversion semiconductor layer **303**. The transparent electrode **305** is made of a compound or an oxide containing indium or tin such as ITO. The reference numeral **306** denotes a SiN protective film.

[0094] It is clear from FIG. 17B that the photoelectric conversion element **S11** has the same construction as the TFT **T11**, and elements in the capacitor **C11** and photoelectric conversion element **S11** are not especially isolated or independent with each other but the capacitor **C11** is formed by expanding the electrode area of the photoelectric conversion element **S11**.

[0095] An example of packaging of the X-ray image pick-up apparatus and a X-ray image pick-up apparatus according to the present invention will be described below.

[0096] FIG. 18A and FIG. 18B denote a schematic construction and cross section of packaging of the X-ray image pick-up apparatus according to the present invention.

[0097] Plural photoelectric conversion elements and TFTs are formed on a sensor substrate **6011** forming a matrix. A shift resistor **SRI** and image pick-up integrated circuit **IC** are packaged on a flexible circuit board **6010** connected to the periphery of the sensor substrate **6011**. The back face of the flexible circuit board **6010** is connected to the circuit boards **PCB1** and **PCB2**. Plural sheets of the sensor substrate **6011** are bonded to a substrate **6012**, while a lead plate **6013** for protecting memories **6014** in a data processing circuit **6018** from X-ray is packaged under the substrate **6012** constituting the large area photoelectric converter. A scintillator **6030** such as CsI as a wavelength converter for converting X-ray into visible light is deposited on the sensor substrate **6011** after flattening the substrate. The overall system is housed in a case **6020** made of a carbon fiber as shown in FIG. 18B.

[0098] FIG. 19 illustrates an example of the X-ray image pick-up apparatus applied to a X-ray diagnosis system.

[0099] X-ray emitted from a X-ray tube **6050** transmits the chest **6062** of a patient or examination subject **6061** and impinges a photoelectric converter **604** on which the scintillator is packaged. The incident X-ray involves information in the body of the patient **6061**. The scintillator emits a light in response to the incident X-ray, the light being converted into electric signals to obtain electric information. The information is converted to digital signals that are subjected to image processing to obtain an image observable on a display **6080** in the control room.

[0100] This information can be also transferred to a

remote site with a transmission mean such as a telecommunication network, or can be watched on a display **6081** installed at a separated doctor room to enable a doctor residing at a remote site to make a diagnosis. The information can be of course either stored on storage **6082** and **6083** such as an optical disk, or recorded on a film **6110** with a film processor **6100**.

[0101] As hitherto described, crystallinity of CsI constituting the scintillator layer as a wavelength converter can be improved according to the present invention. Moreover, a highly reliable reflection film and protective film can be manufactured by flattening the surface roughness of the CsI scintillator layer.

[0102] When the apparatus is manufactured by bonding plural sensor substrates, it is possible to uniformly form the CsI scintillator layer on the plural substrates.

[0103] Consequently, substantial aperture ration can be enhanced to provide a highly sensitive and high-speed image pick-up apparatus.

[0104] The wavelength converter according to the present invention has excellent characteristics owing to improved and uniform crystallinity of CsI with good repeatability, thereby making it possible to prevent sensitivity from being distributed to enable an excellent image information to be obtained.

[0105] A high reliable image pick-up apparatus with good durability can be manufactured with good yield according to the present invention, making it possible to manufacture the apparatus with low production cost.

Claims

1. An image pick-up apparatus comprising a wavelength converter for converting an incident radiation to a light having a wavelength detectable with a photoelectric conversion element on a sensor substrate on which plural photoelectric conversion elements and switching elements are disposed, wherein a flattening layer having a flat face making a contact with the wavelength converter is provided between the sensor substrate and wavelength converter.
2. An image pick-up apparatus according to Claim 1, wherein the flattening layer is obtained by flattening a protective layer provided on the sensor substrate.
3. An image pick-up apparatus according to Claim 1, wherein the flattening layer is provided on a protective layer on the sensor substrate.
4. An image pick-up apparatus according to Claim 1, wherein a second flattening layer is provided on the wavelength converter.
5. An image pick-up apparatus according to Claim 4, wherein the second flattening layer covers the end

- face of the wavelength converter.
6. An image pick-up apparatus according to Claim 1, wherein the surface of the wavelength converter is flattened.
 7. An image pick-up apparatus according to Claim 4, wherein a light reflection film is provided on the second flattening layer.
 8. An image pick-up apparatus according to Claim 6, wherein a light reflection film is provided on the flattened wavelength converter.
 9. An image pick-up apparatus according to Claim 1, wherein the wavelength converter comprises a scintillator.
 10. An image pick-up apparatus according to Claim 9, wherein the scintillator comprises a columnar crystal.
 11. An image pick-up apparatus according to Claim 9, wherein the scintillator comprises a Csl crystal.
 12. An image pick-up apparatus according to Claim 7, wherein the light reflection film is made of an aluminum film.
 13. An image pick-up apparatus according to Claim 8, wherein the light reflection film is made of an aluminum film.
 14. An image pick-up apparatus according to Claim 8 having plural sensor substrates.
 15. An image pick-up apparatus comprising plural sensor substrates on which plural pairs of a photoelectric conversion element and a switching element are disposed, the plural sensor substrates comprising flattening layers on which a wavelength converter is provided on each flattening layer.
 16. An image pick-up apparatus according to Claim 15, wherein a second flattening layer is provided on the wavelength converter.
 17. An image pick-up apparatus according to Claim 16, wherein the second flattening layer covers the end face of the wavelength converter.
 18. An image pick-up apparatus according to Claim 16, wherein a light reflection film is provided on the second flattening layer.
 19. An image pick-up apparatus according to Claim 15, wherein the wavelength converter comprises a scintillator.
 20. An image pick-up apparatus according to Claim 19, wherein the scintillator layer comprises a columnar crystal.
 21. An image pick-up apparatus according to Claim 20, wherein the scintillator layer comprises a Csl crystal.
 22. An image pick-up apparatus according to Claim 18, wherein the light reflection film is made of an aluminum film.
 23. An image pick-up system comprising an image pick-up apparatus provided with a wavelength converter for converting an incident radiation to a light having a wavelength detectable with a photoelectric conversion element on a sensor substrate on which plural photoelectric conversion elements and switching elements are disposed, wherein a flattening layer having a flat face making a contact with the wavelength converter is provided between the sensor substrate and wavelength converter, comprising
 - a signal processing means for processing the signal from the image pick-up apparatus; and
 - a display means for displaying the signal from the signal processing means.
 24. An image pick-up system according to Claim 23, further comprising a telecommunication means for transferring the signal from the signal processing means.
 25. An image pick-up apparatus system to Claim 23, further comprising a recording means for recording the signal from the signal processing means.
 26. An image pick-up system according to Claim 23, further comprising a storage means for storing the signal from the signal processing means.
 27. An image pick-up system comprising:
 - an image pick-up apparatus comprising plural sensor substrates on which plural photoelectric conversion elements and switching elements are disposed, flattening layers being provided on respective sensor substrates and a wavelength converter being provided on each flattening layer, comprising:
 - a signal processing means for processing the signal from the image pick-up apparatus; and
 - a display means for displaying the signal from the signal processing means.
 28. An image pick-up system according to Claim 27, further comprising a recording means for recording

the signal from the signal processing means.

29. An image pick-up system according to Claim 27, further comprising a telecommunication means for transferring the signal from the signal processing means.
30. An image pick-up system according to Claim 27, further comprising a storage means for storing the signal from the signal processing means.
31. A method for manufacturing an image pick-up apparatus comprising the steps of:
 - forming a protective layer on a sensor substrate on which plural photoelectric conversion elements and switching elements are disposed; forming a flattening layer having a flat surface on the protective layer; and forming a wavelength converter on the flattening layer.
32. A method for manufacturing the image pick-up apparatus according to Claim 31, comprising a step for providing a second flattening layer on the wavelength converter.
33. A method for manufacturing the image pick-up apparatus according to Claim 32, wherein the second flattening layer covers the end face of the wavelength converter.
34. A method for manufacturing the image pick-up apparatus according to Claim 31, comprising a step of flattening the wavelength converter.
35. A method for manufacturing the image pick-up apparatus according to Claim 32, comprising a step for providing a light reflection film on the second flattening layer.
36. A method for manufacturing the image pick-up apparatus according to Claim 34, comprising a step of providing a light reflection film on the flattened wavelength converter.
37. A method for manufacturing the image pick-up apparatus according to Claim 31, wherein the step for forming the wavelength converter comprises a vacuum deposition step.
38. A method for manufacturing the image pick-up apparatus comprising the steps of:

forming a protective layer on a sensor substrate on which plural photoelectric conversion elements and switching elements are disposed; flattening the surface of the protective layer;

and

forming a scintillator layer on the flattened protective layer.

39. A method for manufacturing the image pick-up apparatus according to Claim 38 comprising the steps of forming a second flattening layer on the wavelength converter.
40. A method for manufacturing the image pick-up apparatus according to Claim 39, wherein the second flattening layer covers the end face of the wavelength converter.
41. A method for manufacturing the image pick-up apparatus according to Claim 38 comprising the step of flattening the wavelength converter.
42. A method for manufacturing the image pick-up apparatus according to Claim 39 comprising the step of forming a reflection film on the second flattening layer.
43. A method for manufacturing the image pick-up apparatus according to Claim 41 comprising the step of forming a light reflection film on the flattened wavelength converter.
44. A method for manufacturing the image pick-up apparatus according to Claim 38, wherein the step for forming the wavelength converter comprises a vapor deposition step.
45. A method for manufacturing an image pick-up apparatus comprising the steps of:
 - disposing plural sensor substrates on which plural pairs of a photoelectric conversion element and a switching element are disposed, a flattening layer being formed on respective plural sensor substrates; and providing a wavelength converter on the flattened layer.
46. A method for manufacturing an image pick-up apparatus according to Claim 45 comprising the step of forming a second flattening layer on the wavelength converter.
47. A method for manufacturing an image pick-up apparatus according to Claim 46, wherein the second flattening layer is provided so as to cover the end face of the scintillator layer.
48. A method for manufacturing an image pick-up apparatus according to Claim 46, comprising a step of providing a light reflection layer on the second flattening layer.

49. A method for manufacturing an image pick-up apparatus according to Claim 45, wherein the step for providing the wavelength converter comprises a vacuum deposition step.

5

50. A method for manufacturing an image pick-up apparatus according to Claim 45, wherein the wavelength converter comprises a scintillator made of a columnar crystal.

10

51. A method for manufacturing an image pick-up apparatus according to Claim 45, wherein the wavelength converter comprises a Csl crystal.

15

20

25

30

35

40

45

50

55

FIG. 1

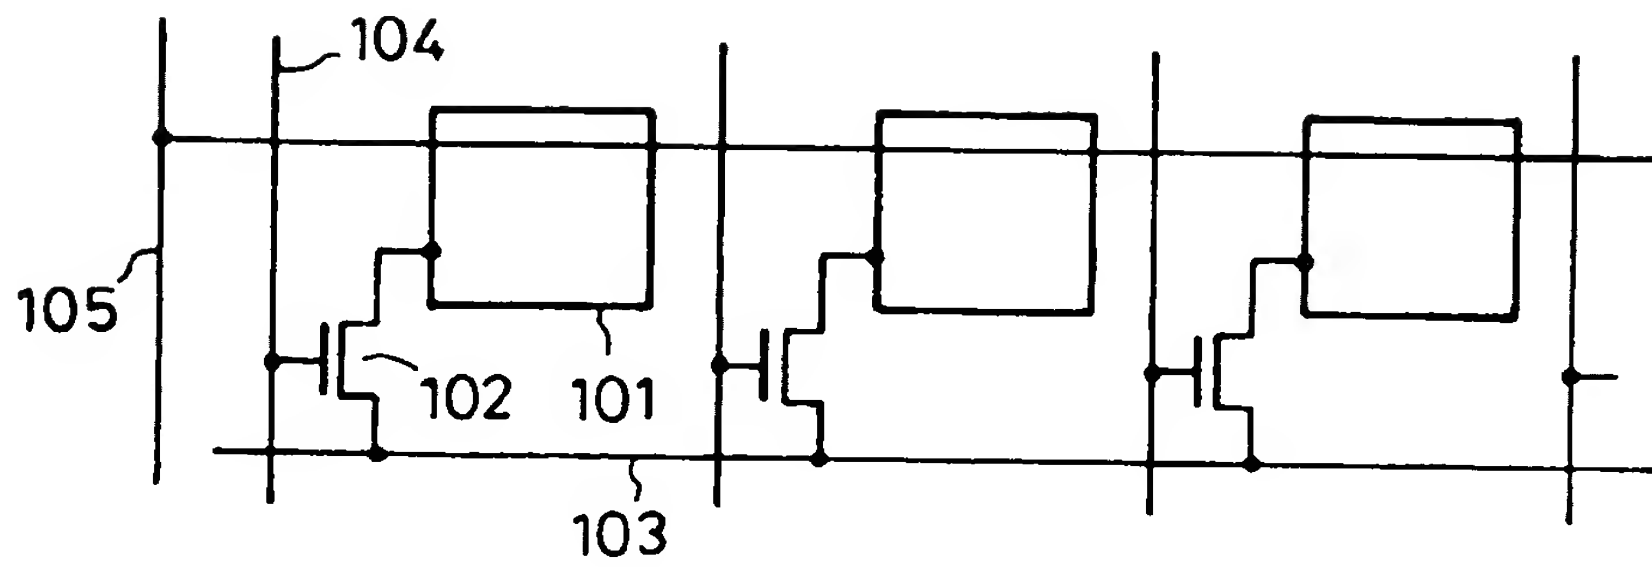


FIG. 2

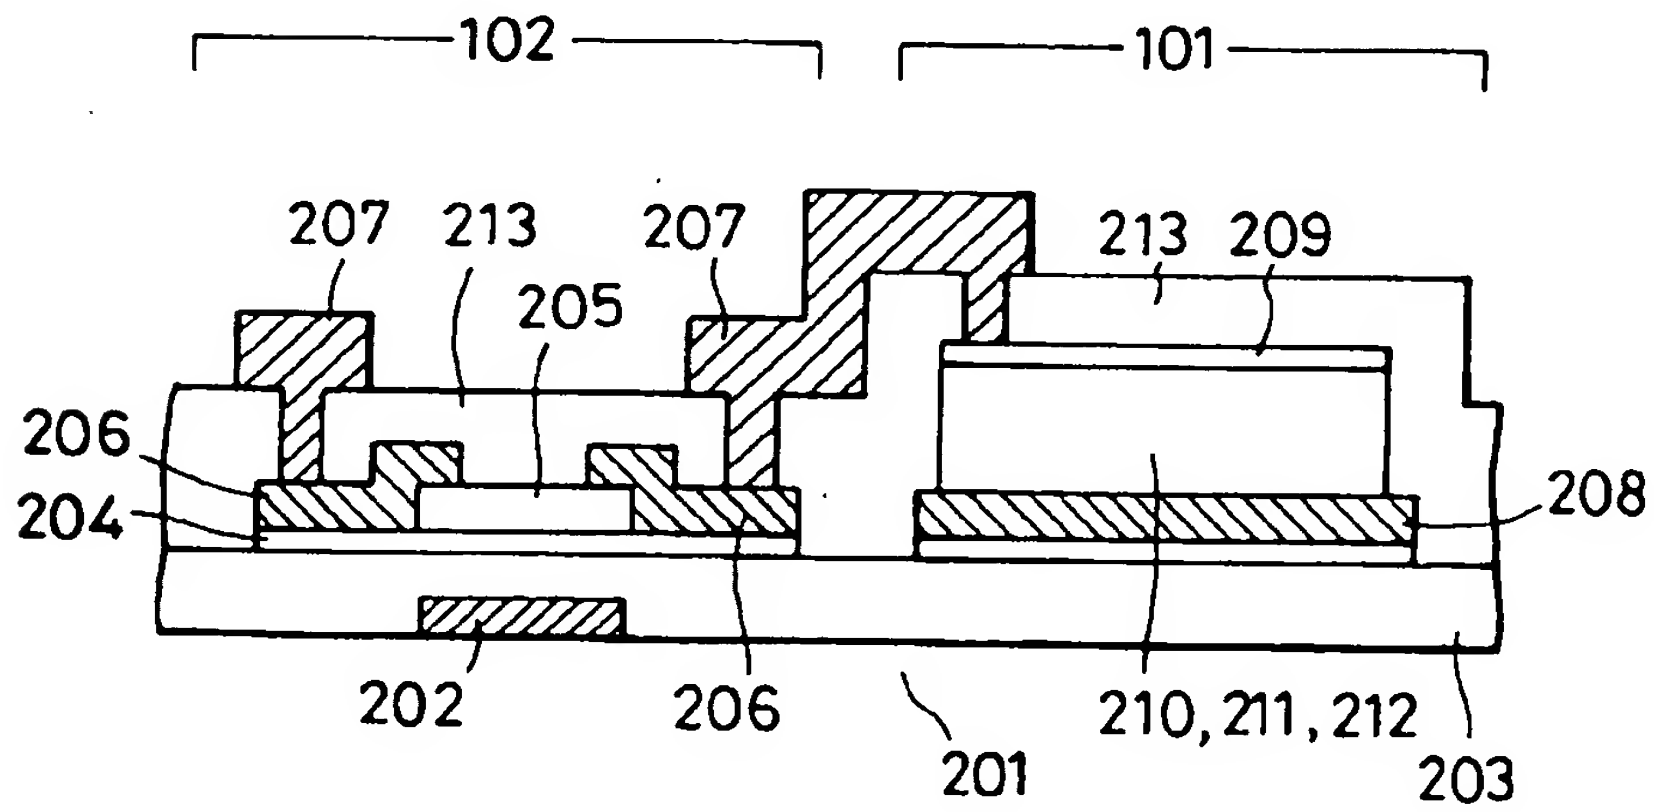


FIG. 3A

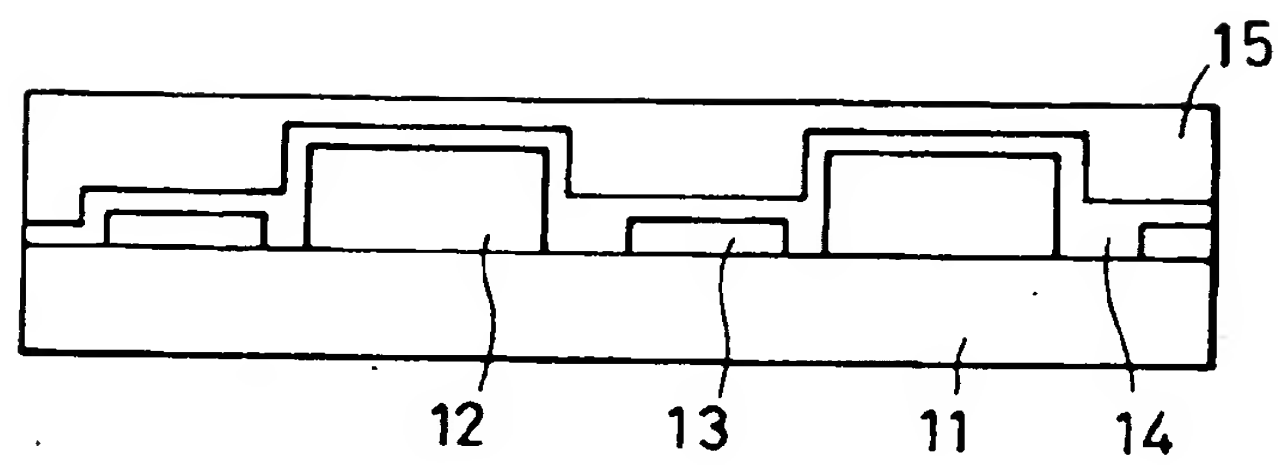


FIG. 3B

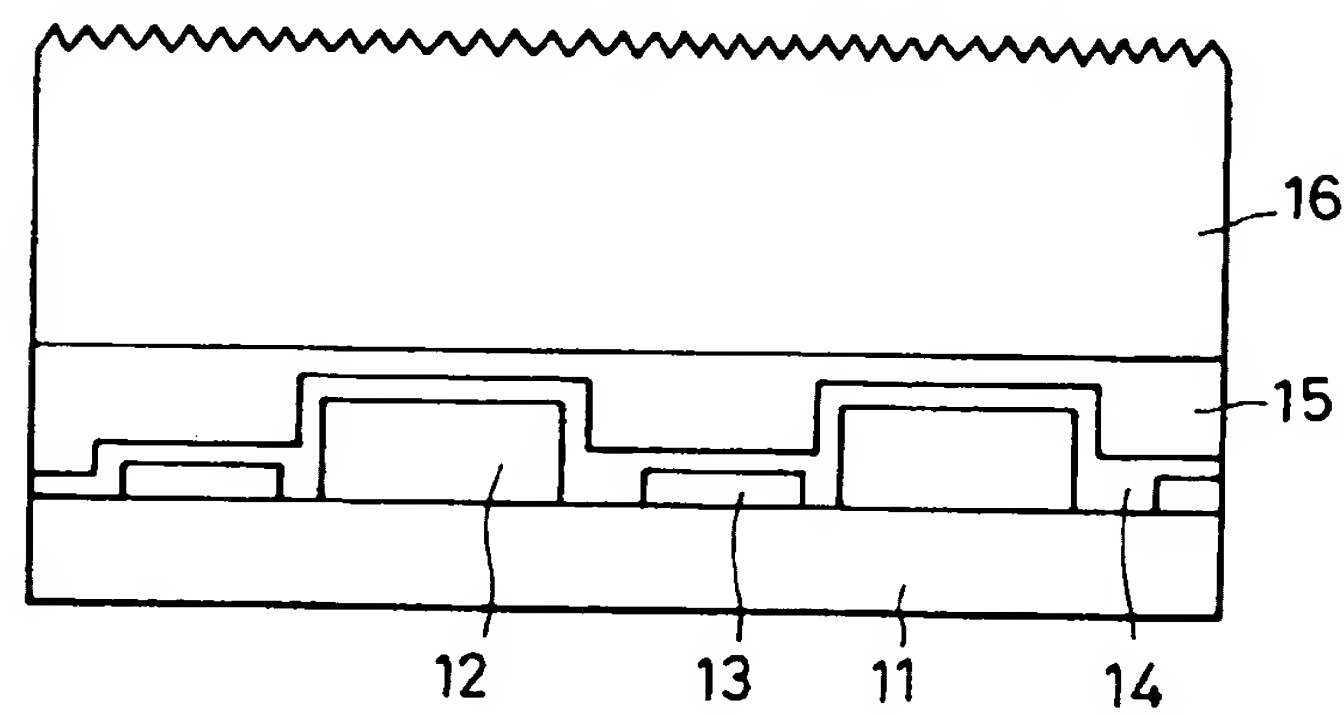


FIG. 4A

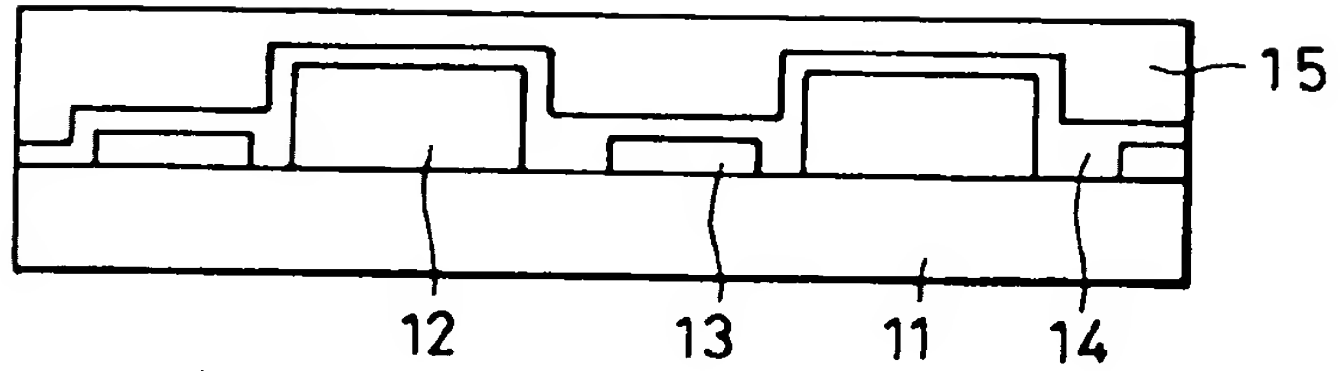


FIG. 4B

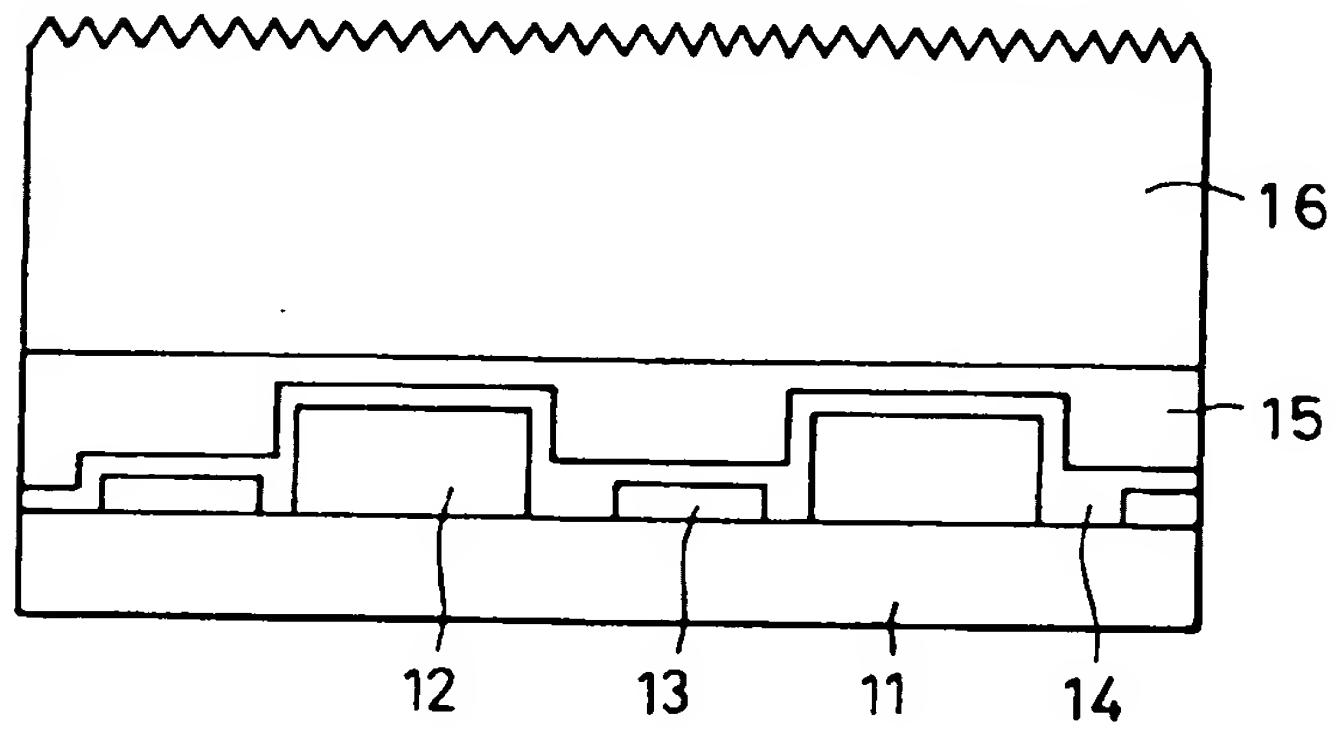


FIG. 4C

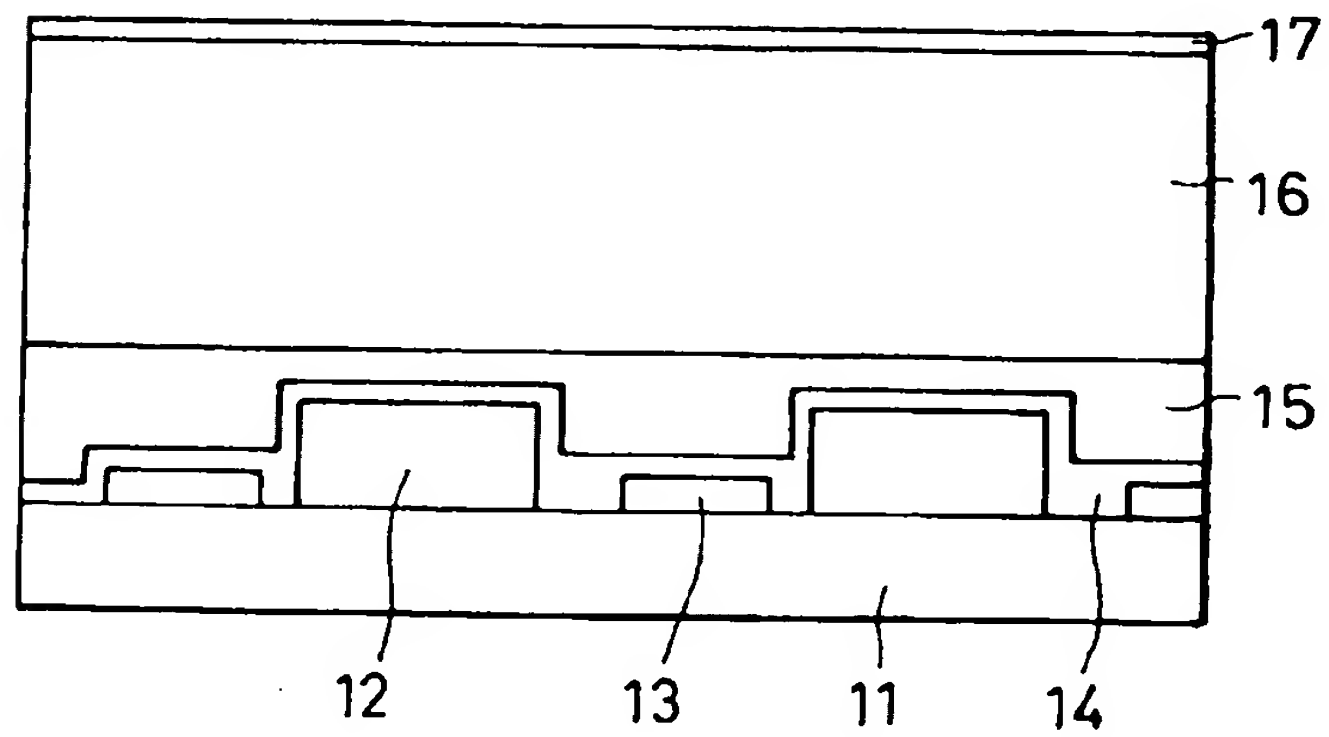


FIG. 5

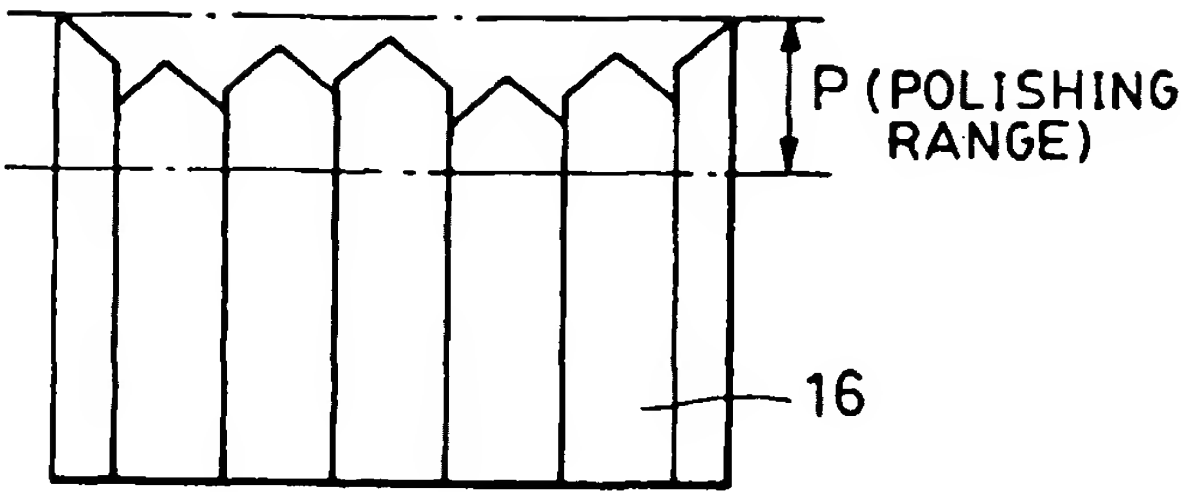


FIG. 6

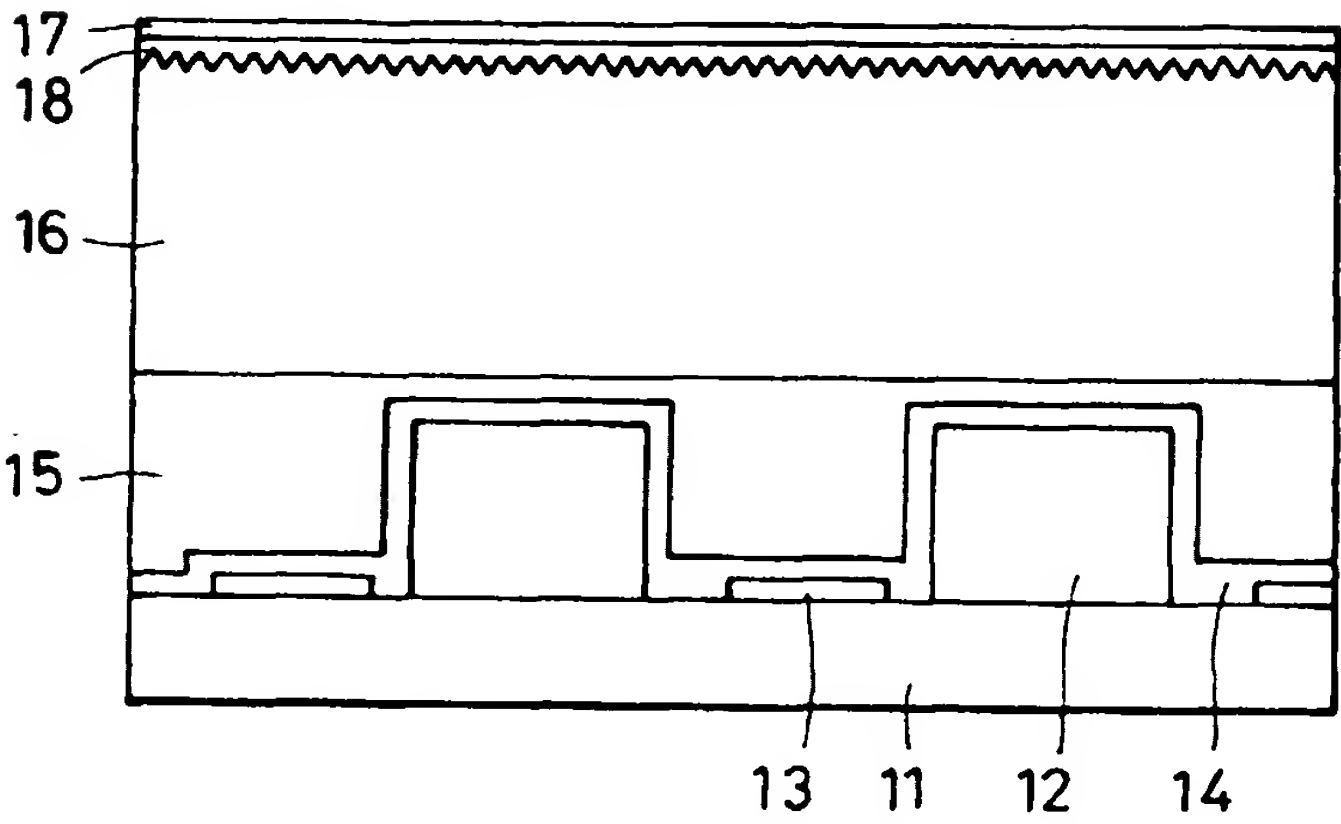


FIG. 7

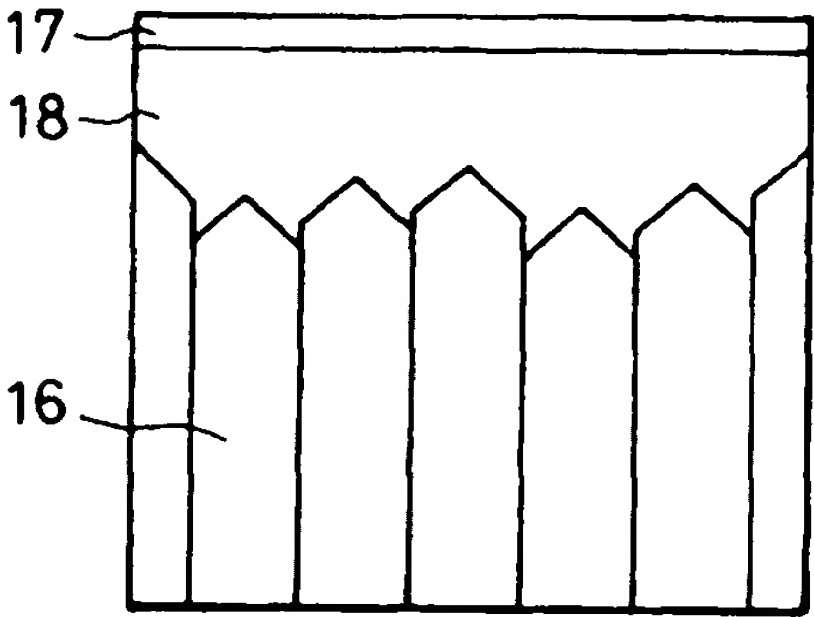


FIG. 8A

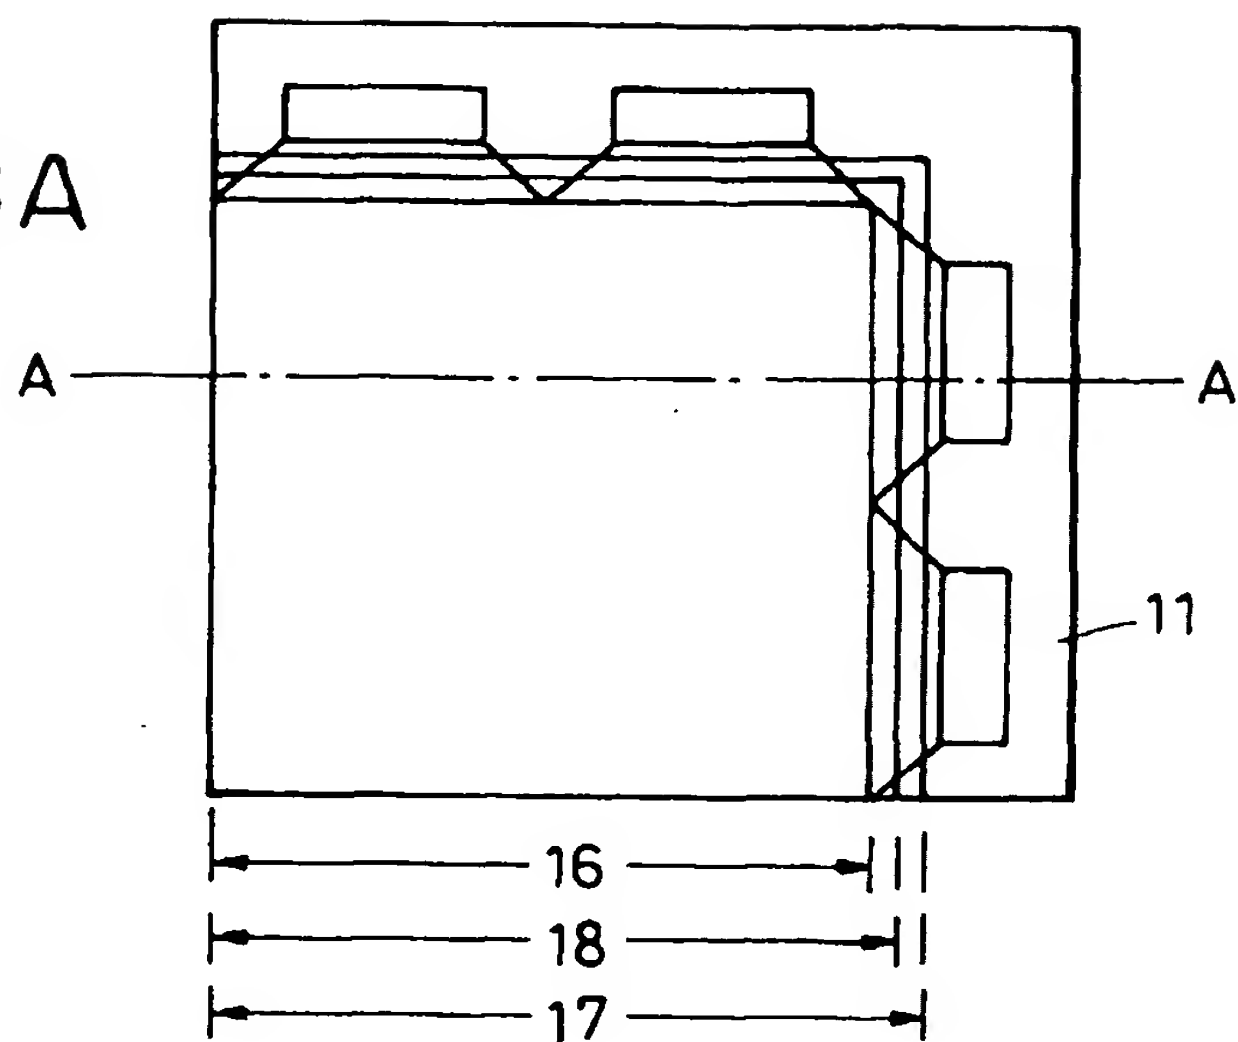


FIG. 8B

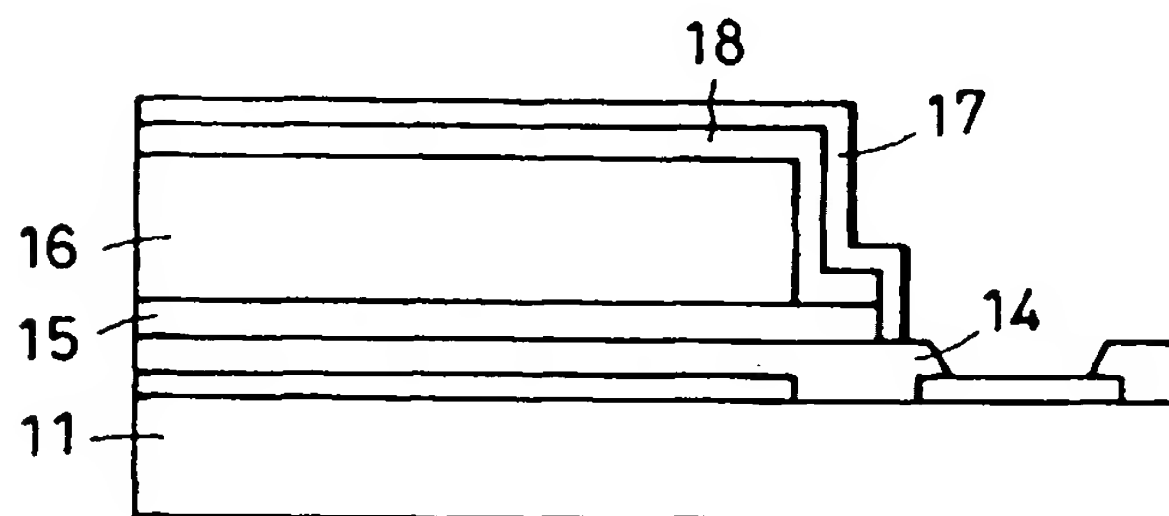


FIG. 9A



FIG. 9B

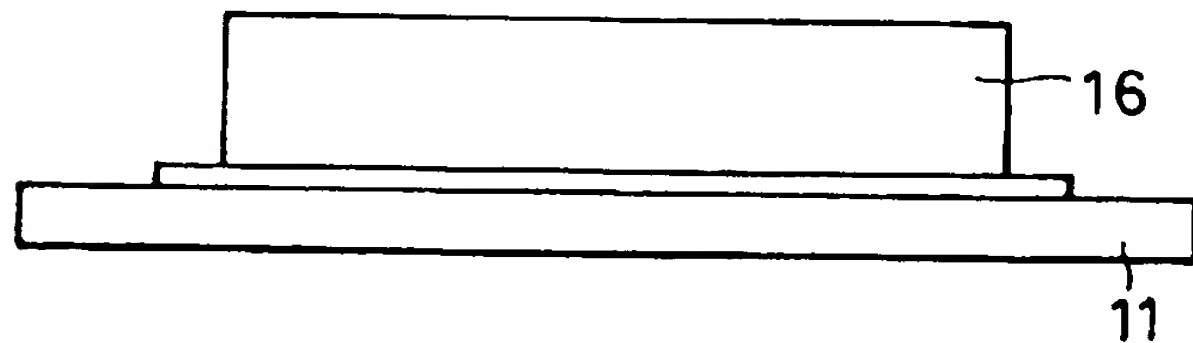


FIG. 9C

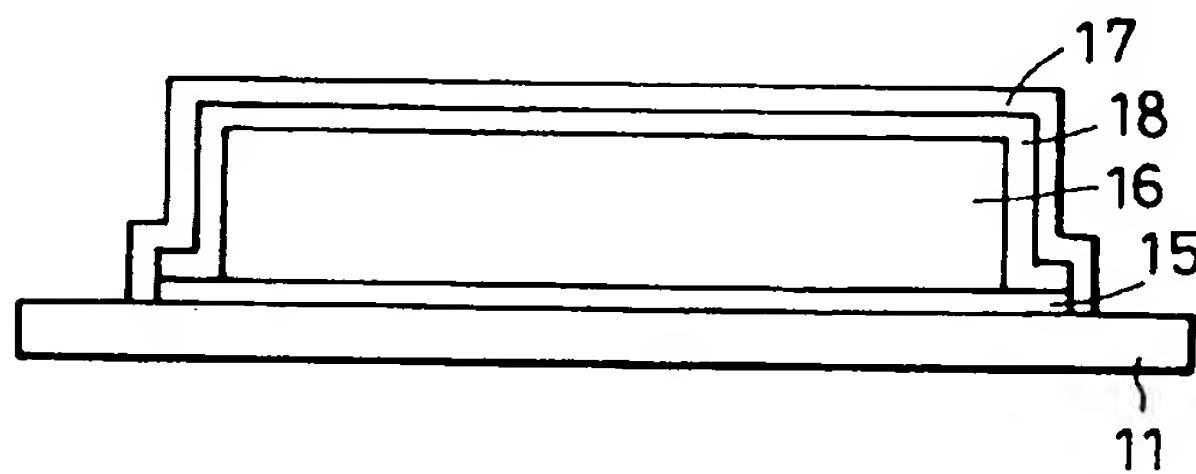


FIG. 9D

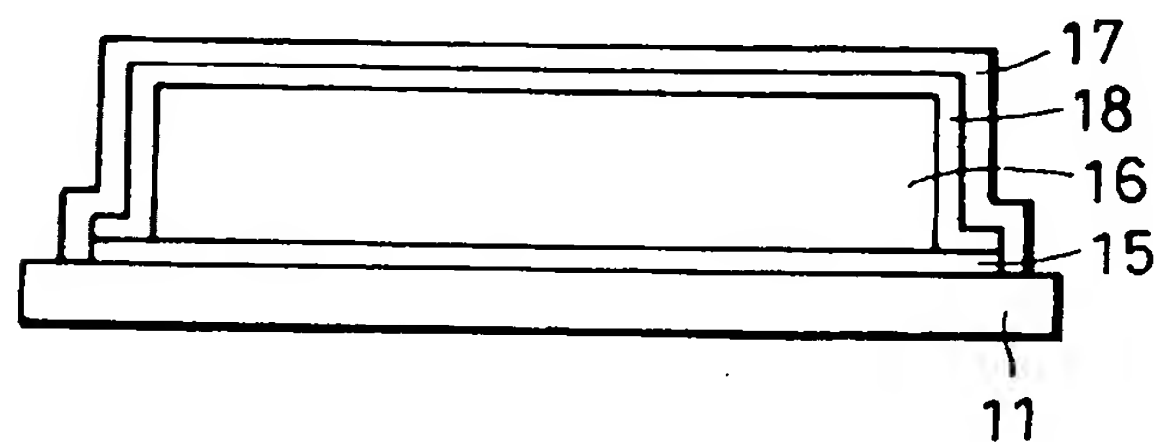


FIG. 10

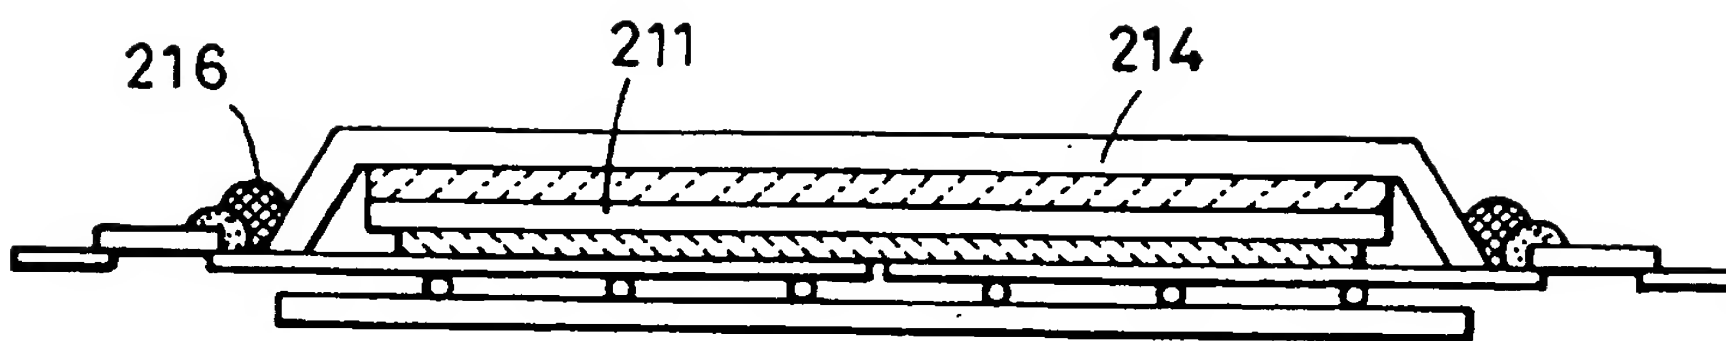


FIG. 11

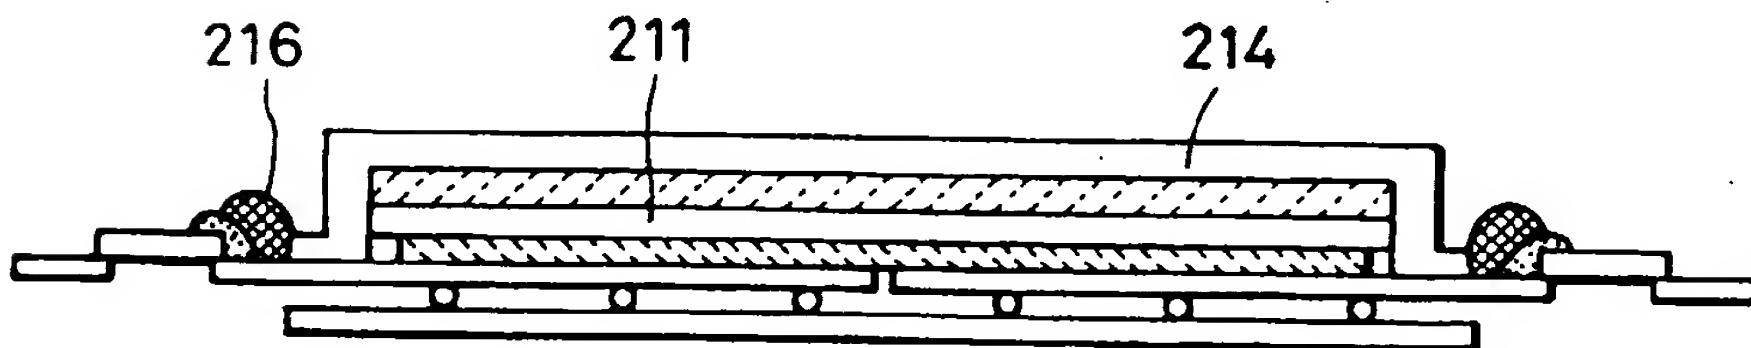


FIG. 12A

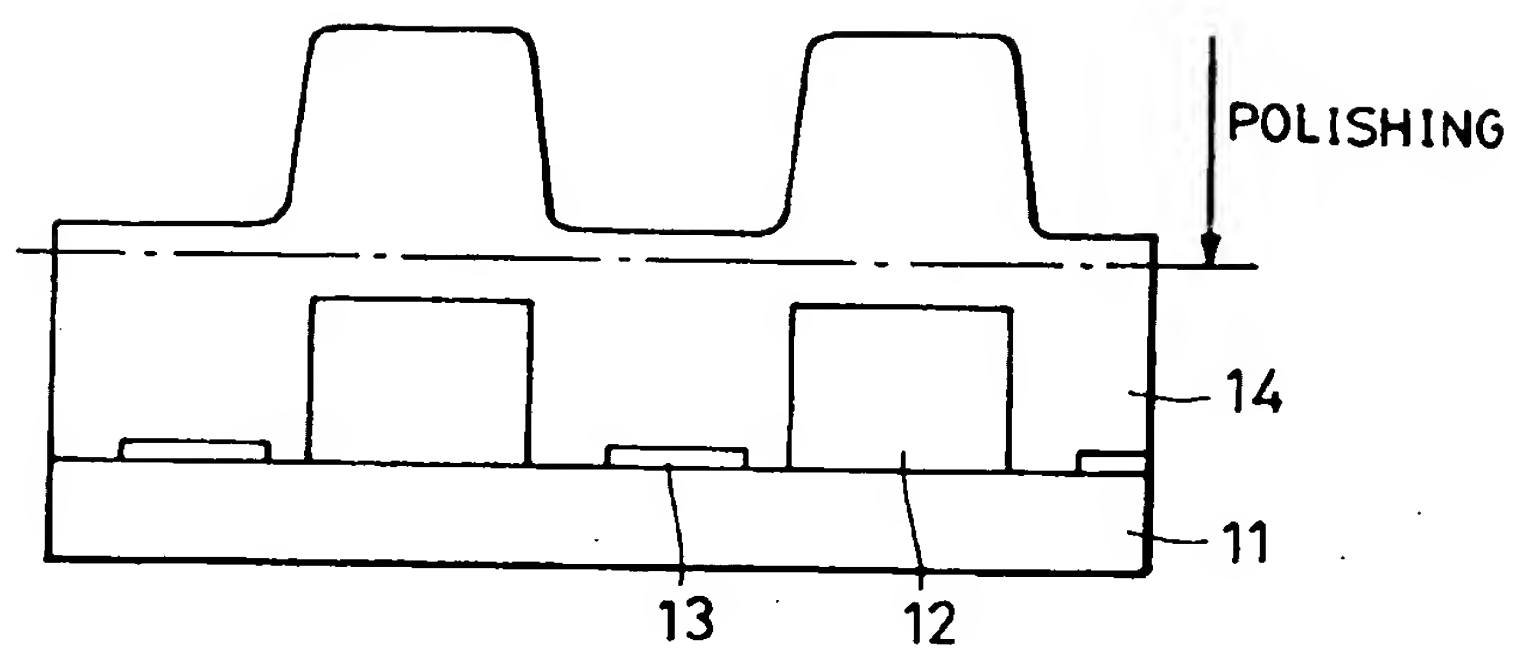


FIG. 12B

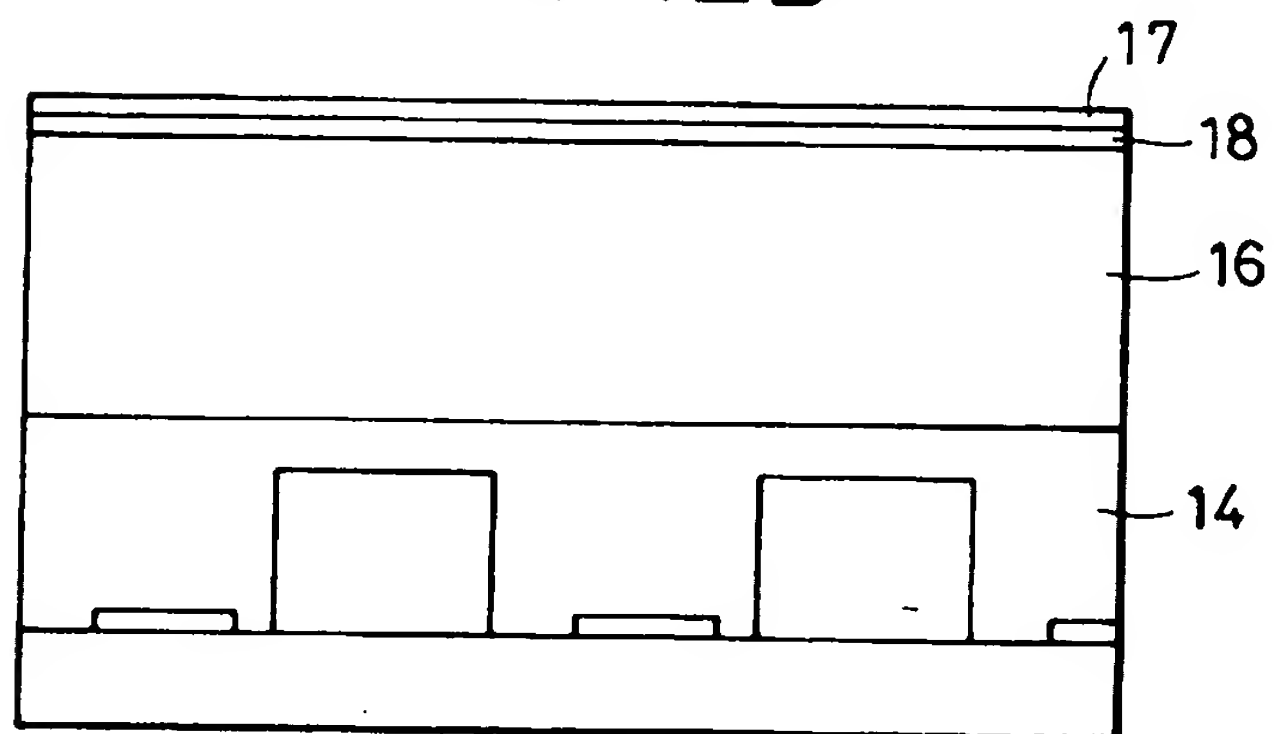


FIG. 13A

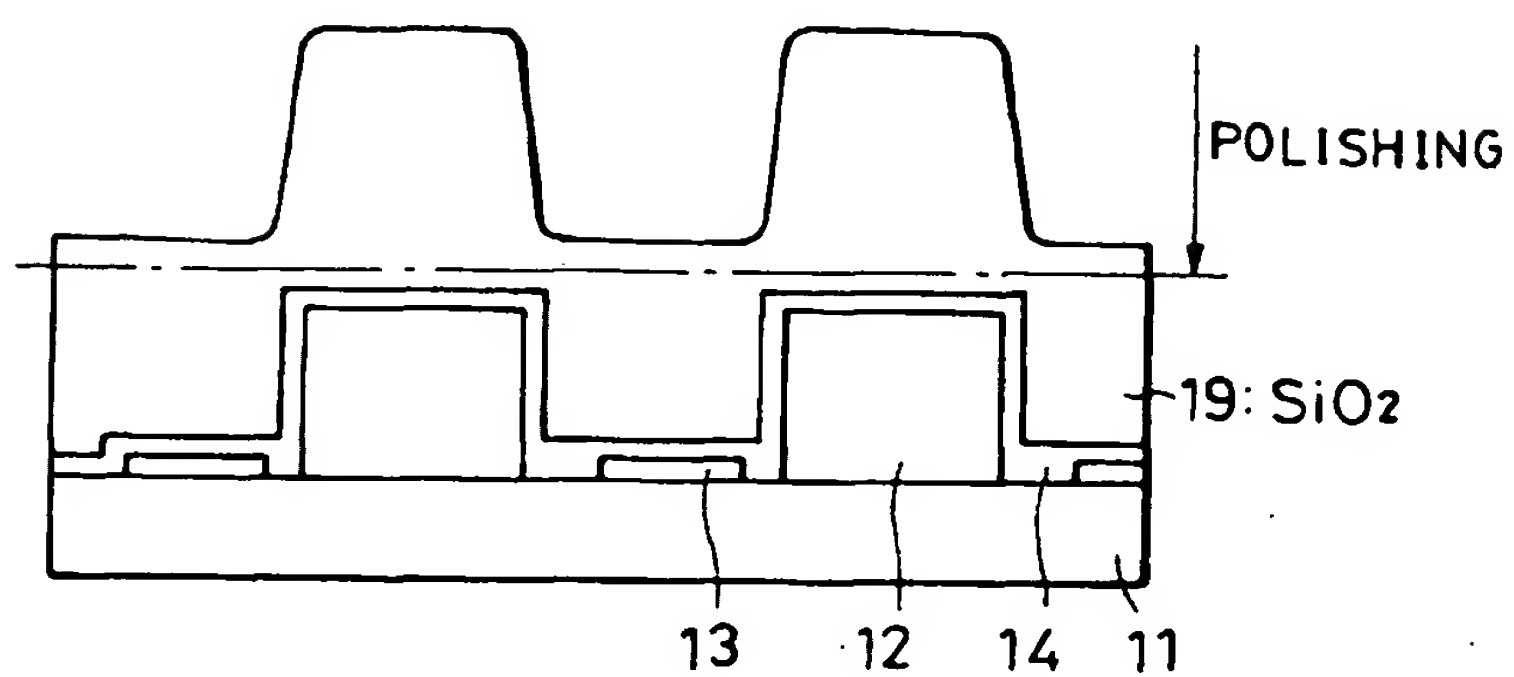


FIG. 13B

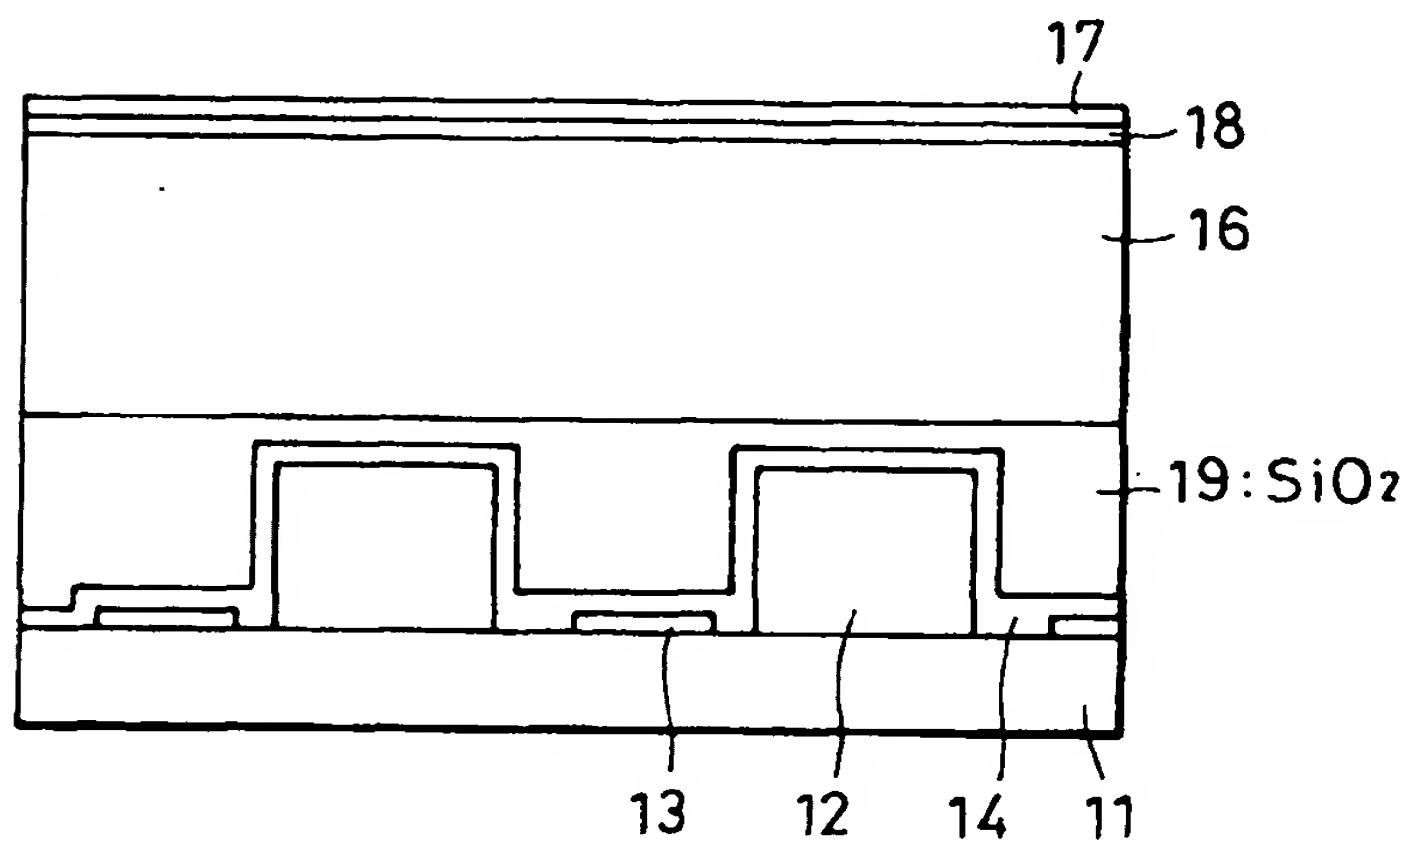


FIG. 14

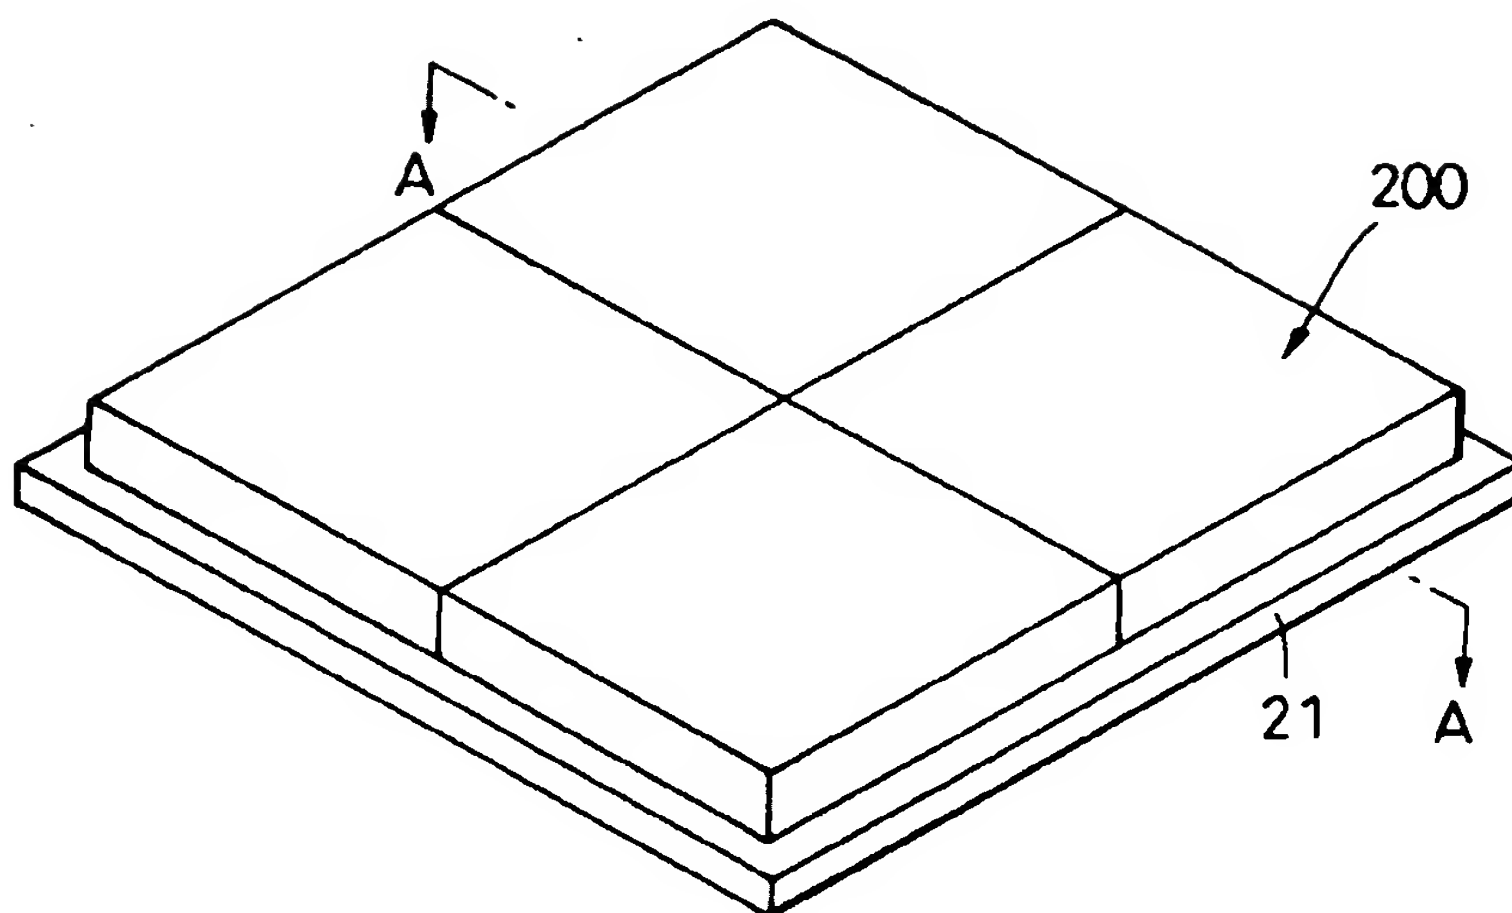


FIG. 15

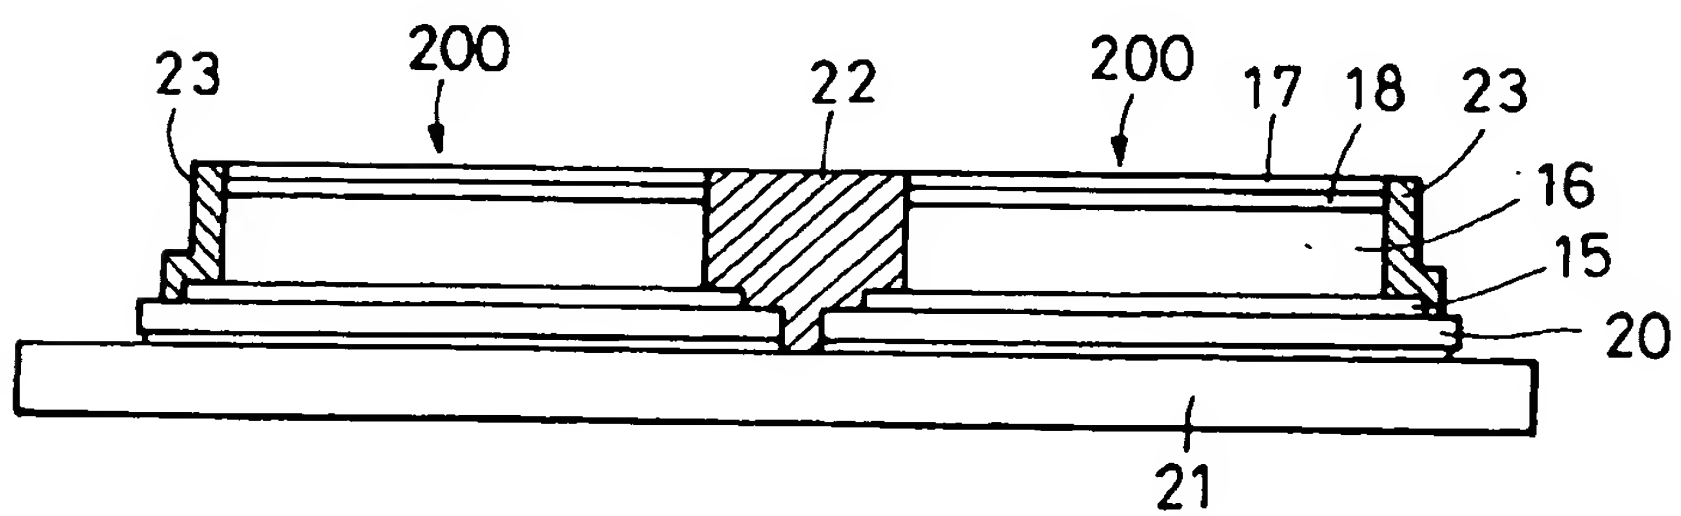


FIG. 16A

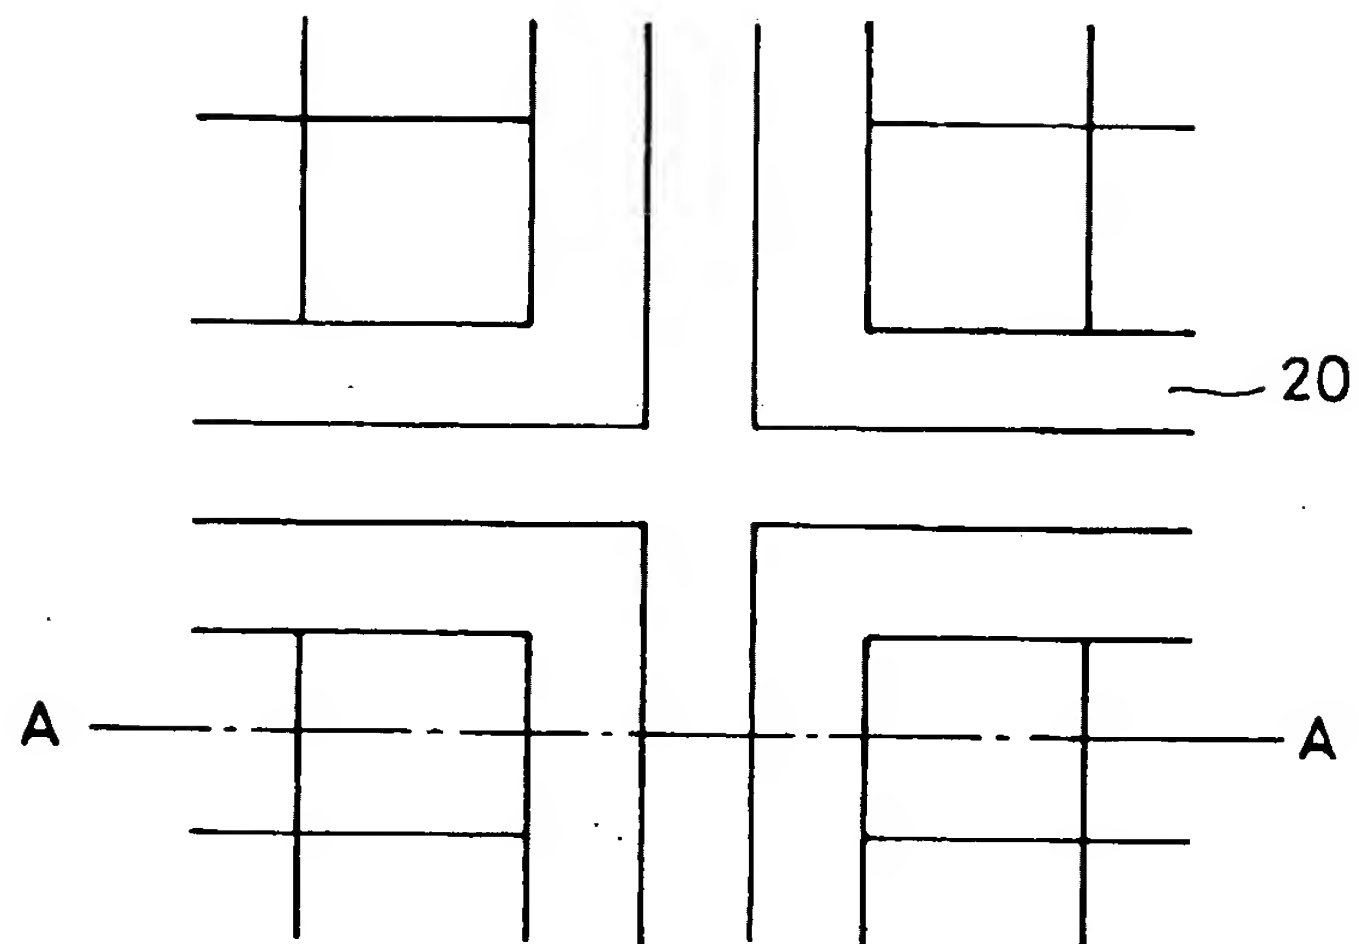


FIG. 16B

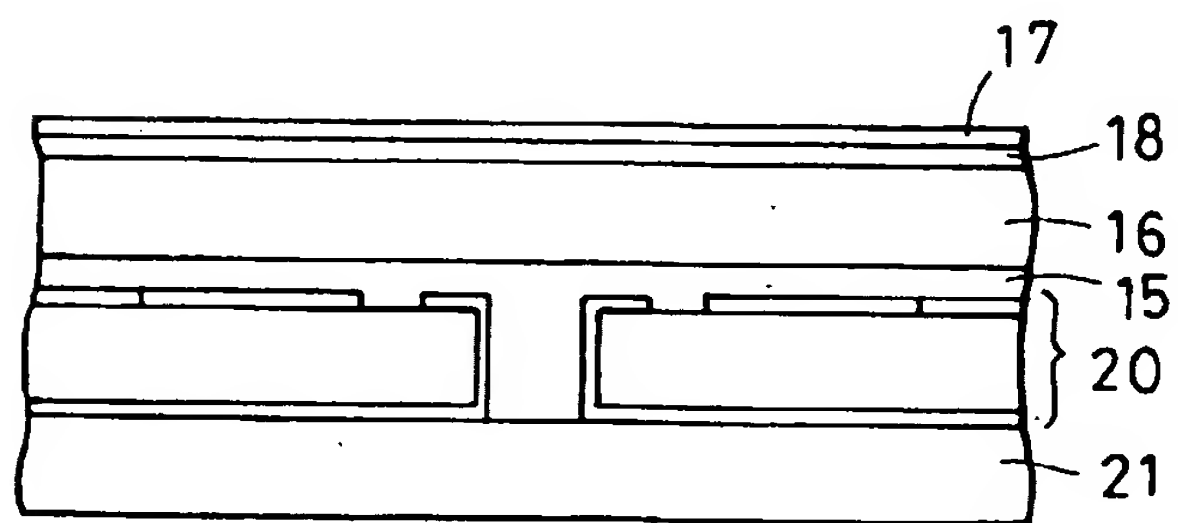


FIG. 17A

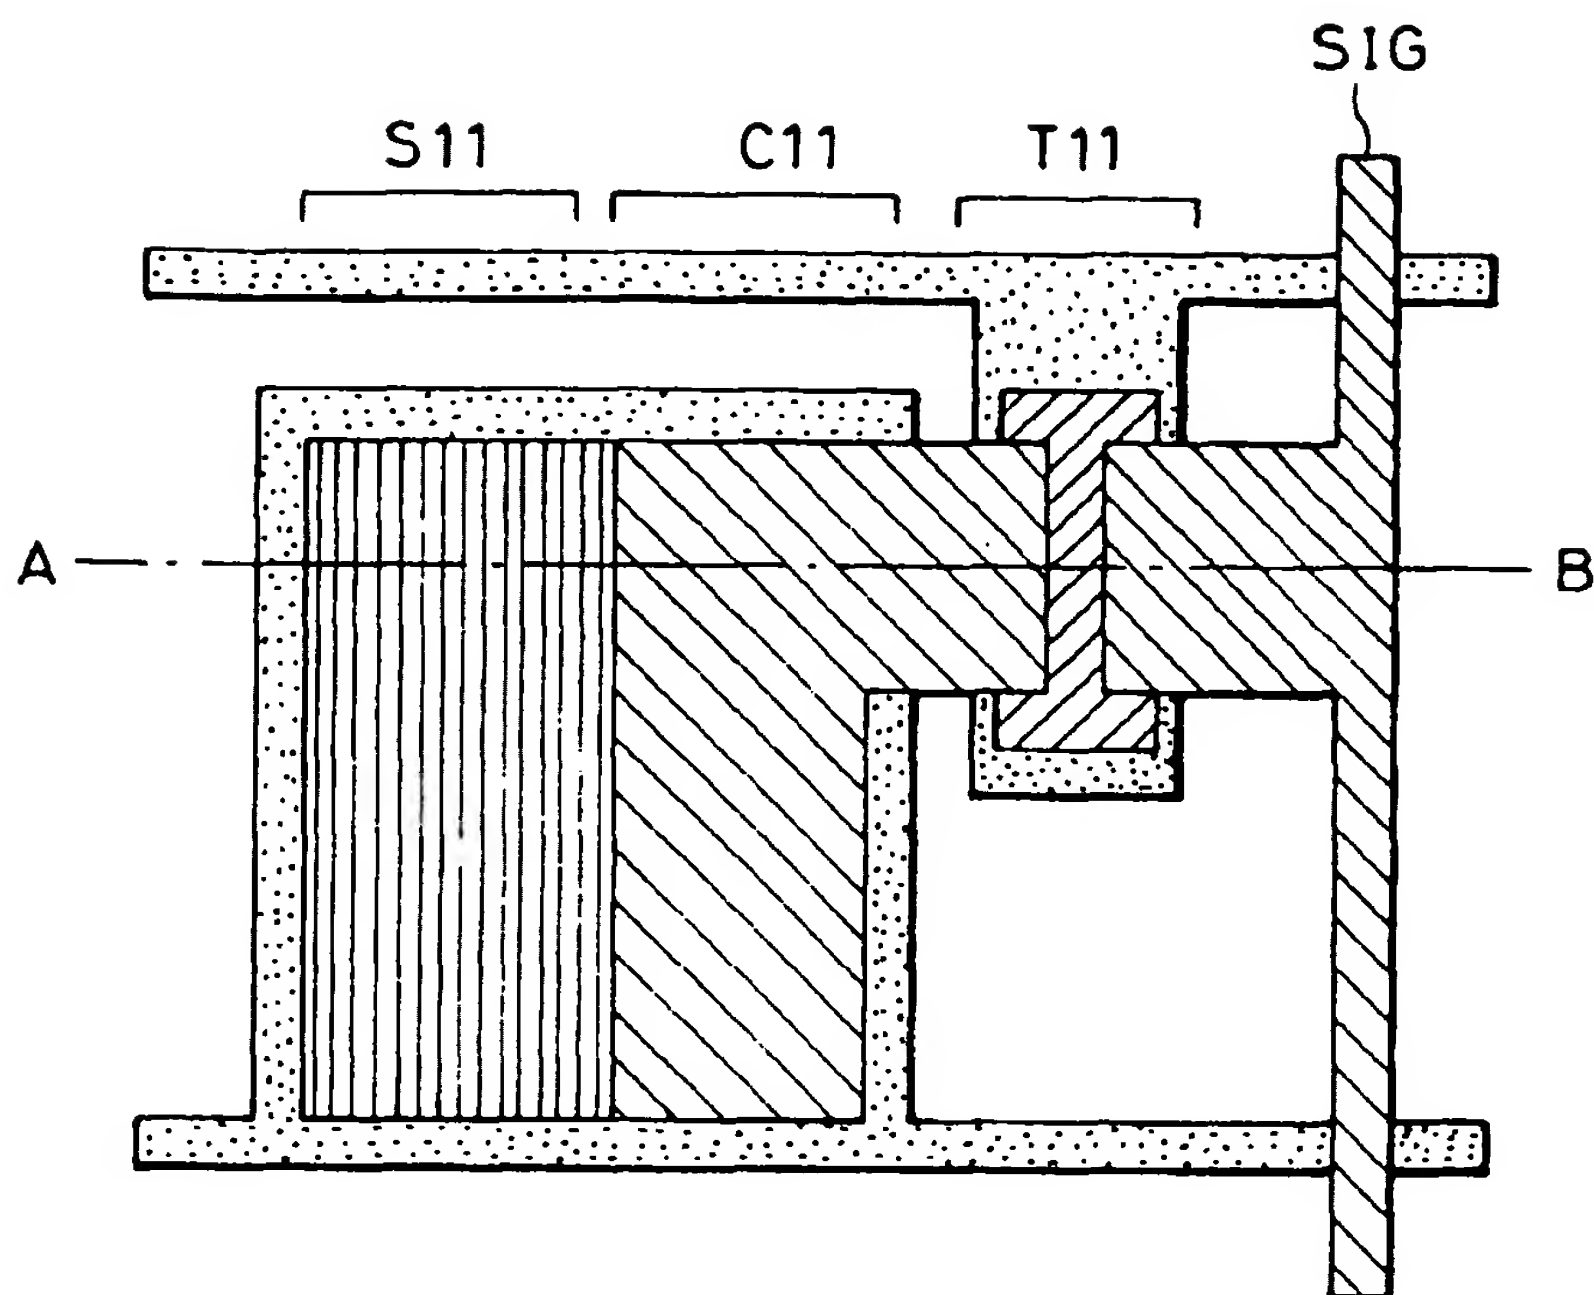


FIG. 17B

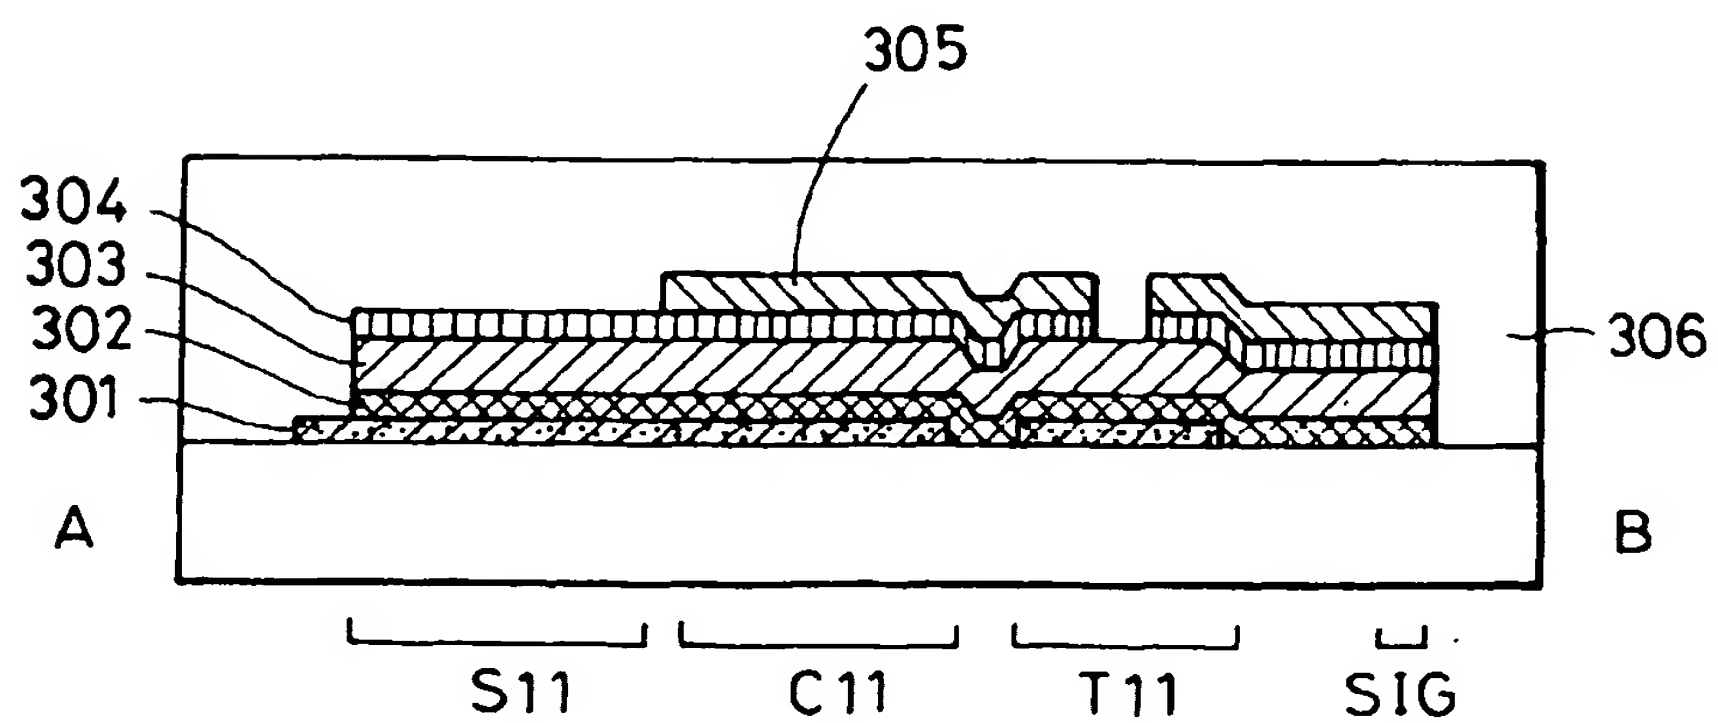


FIG. 18A

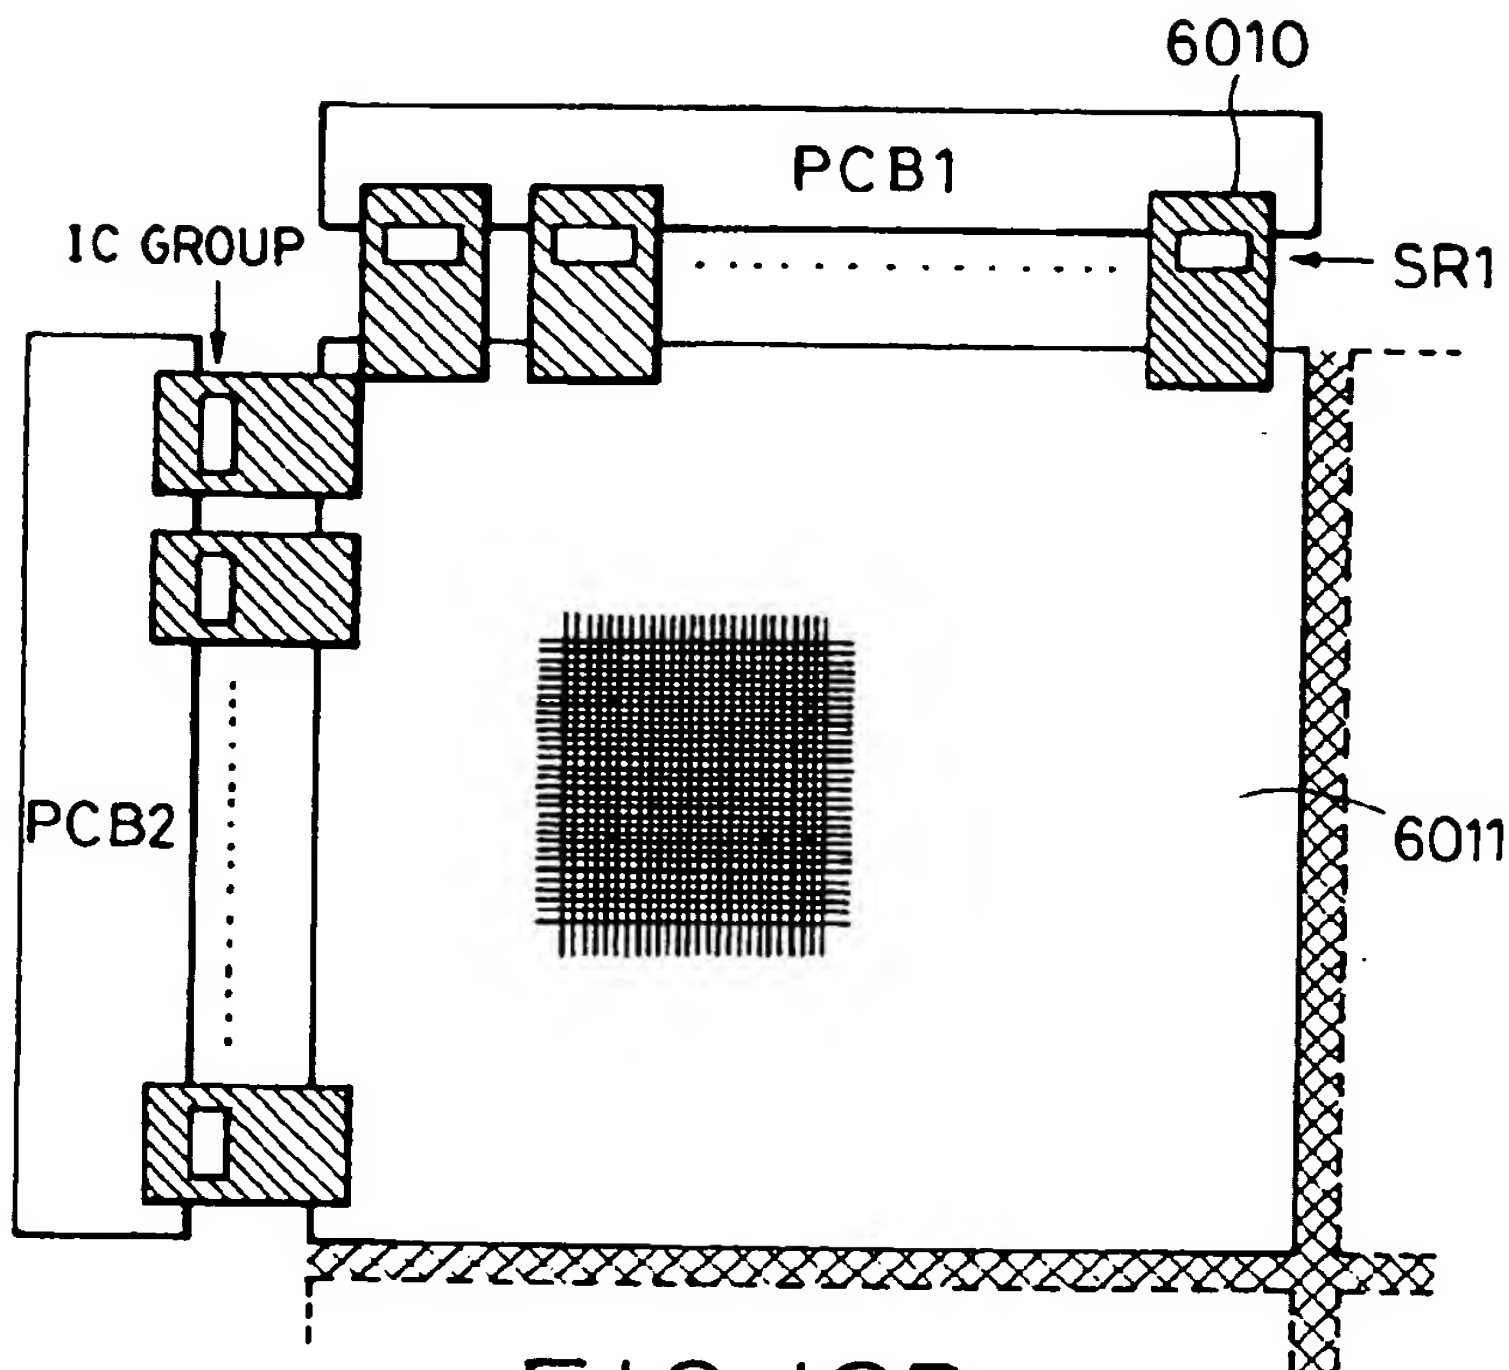


FIG. 18B

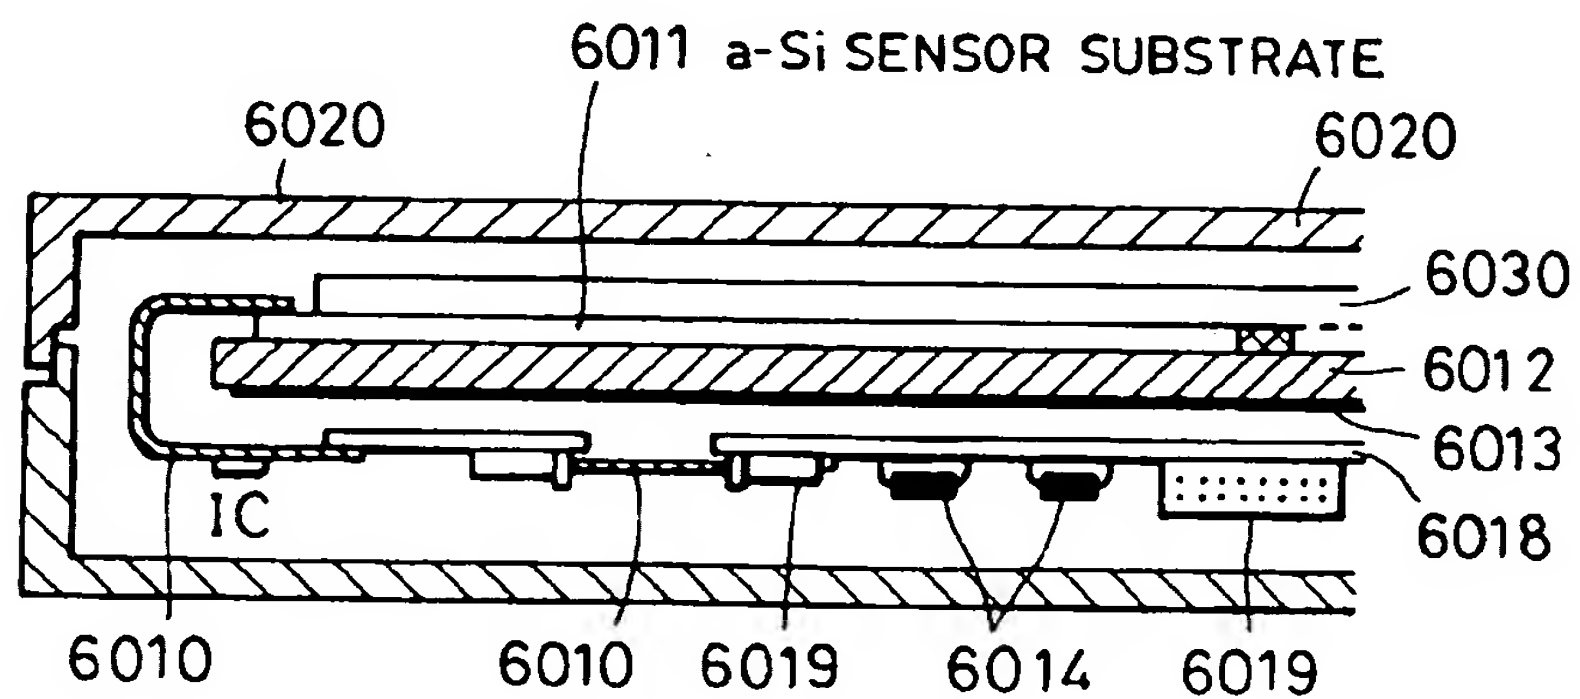


FIG. 19

